

 **CHIEFTEC**
IN THIS YOU CAN TRUST

2026



PRODUCT CATALOGUE

CASE

E-ATX/ATX	002
mATX	011
ITX	018
19" IPC	020

PSU

ATX	023
SFX	030
TFX	031
External PSU	

Cooling

Air cooling	033
Water cooling	033
Fan	035

Accessories

Backplanes	040
External box	041
Docking station	
USB hubs	
Card reader	

Class

01


CASE

E-ATX / ATX

mATX

ITX

19"IPC

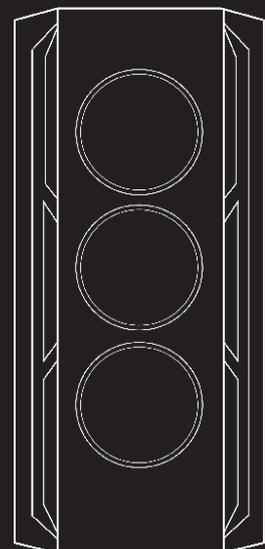

E-ATX / ATX



VISTA GT-01B-OP

GT-

M/B Support	Mini ITX, M-ATX, ATX
Drive Bay	int. : 2x 2.5" & 1x 3.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	1x USB Type C, 1x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Mode Button
Cooling System	Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 120mm radiator PSU Cover: 3x 120mm M/B Side: 2x 120mm
Pre-installed	3x 120mm ARGB Fans
Dimension	425mm x 212mm x 492mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 400mm



BW-01B-OP

BW-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 2 x 5.25" int. : 6 x 3.5" and 4 x 2.5"
Power Supply	ATX PSU (optional, up to 160 mm length)
Front I/O	1x USB Type C, 1 x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 2x 120mm / 2x 140mm fan Rear: 1x 120mm fan Top: 3x 120mm / 3x 140mm fan / 240mm radiator / 360mm radiator (use of 360mm radiator blocks first ODD drive)
Pre-installed	1x 120mm PWM fan
Dimension	510mm x 200mm x 465mm
CPU Cooler Support	Max. 157mm
VGA Support	Max. 310mm (or 410mm, if 2.5" SSD cage is not installed)



Pro Midi TG AS-02B-TG-OP

AS-

M/B Support	Mini ITX, M-ATX, ATX
Drive Bay	int. : 3x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	1x USB Type C, 1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 2x 120mm / 2x 140mm / 240mm radiator / 280mm radiator Rear: 1x 120mm PSU Cover: 2 x 120mm
Pre-installed	1x 120mm PWM fan
Dimension	390mm x 215mm x 485mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 340mm (295mm if water cooling installed in the front)



Pro Midi Q AS-02B-OP

AS-

M/B Support	Mini ITX, M-ATX, ATX
Drive Bay	int. : 3x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	1x USB Type C, 1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 2x 120mm / 2x 140mm / 240mm radiator / 280mm radiator Rear: 1x 120mm PSU Cover: 2 x 120mm
Pre-installed	1x 120mm PWM fan
Dimension	390mm x 215mm x 485mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 340mm (295mm if water cooling installed in the front)



VISIO white GM-30W-TG-OP

GM-

M/B Support	Mini ITX, M-ATX, ATX
Drive Bay	int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	1x USB3.2 Gen2 Type C, 2 x USB3.0, Audio-out (AZALIA / HDAudio), Mic-In
Cooling System	Bottom: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360 mm radiator M/B side: 2x 120mm / 240mm radiator Rear: 1x 120mm / 1x 140mm
Pre-installed	6x 120mm ARGB Fans
Dimension	430mm x 295mm x 390mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 410mm



VISIO GM-30B-TG-OP

GM-

M/B Support	Mini ITX, M-ATX, ATX
Drive Bay	int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	1x USB3.2 Gen2 Type C, 2 x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Bottom: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360 mm radiator M/B side: 2x 120mm / 240mm radiator Rear: 1x 120mm / 1x 140mm
Pre-installed	6x 120mm ARGB Fans
Dimension	430mm x 295mm x 390mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 410mm



VISIO AIR GM-30B-M-OP

GM-

M/B Support	Mini ITX, M-ATX, ATX
Drive Bay	int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	1x USB3.2 Gen2 Type C, 2 x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Bottom: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360 mm radiator M/B side: 2x 120mm / 240mm radiator Rear: 1x 120mm / 1x 140mm
Pre-installed	3x 140mm PWM Fans
Dimension	430mm x 295mm x 390mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 410mm





APEX LUMO

GA-01B-L-OP

GA-

M/B Support	Mini ITX, mATX, ATX, E-ATX
Drive Bay	int. : 3x 2.5" & 1x 3.5" / 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	1x USB3.2 Gen2 Type C, 2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Modes Button
Cooling System	Front: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator / 420mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 1x 140mm PSU Cover : 2 x 120mm Side: 2 x 120mm
Pre-installed	4x 140mm ARGB Fans
Dimension	465mm x 230mm x 495mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 400mm



APEX Q

GA-01B-Q-OP

GA-

M/B Support	Mini ITX, mATX, ATX, E-ATX
Drive Bay	int. : 3x 2.5" & 1x 3.5" / 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	1x USB3.2 Gen2 Type C, 2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Modes Button
Cooling System	Front: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator / 420mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 1x 140mm PSU Cover : 2 x 120mm Side: 2 x 120mm
Pre-installed	2x 140 PWM Fans, 1x120 PWM Fan
Dimension	465mm x 230mm x 495mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 400mm



APEX

GA-01B-TG-OP

GA-

M/B Support	Mini ITX, mATX, ATX, E-ATX
Drive Bay	int. : 3x 2.5" & 1x 3.5" / 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	1x USB3.2 Gen2 Type C, 2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Modes Button
Cooling System	Front: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator / 420mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 1x 140mm PSU Cover : 2 x 120mm Side: 2 x 120mm
Pre-installed	4x 120 ARGB Fans
Dimension	465mm x 230mm x 495mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 400mm



APEX AIR

GA-01B-M-OP

GA-

M/B Support	Mini ITX, mATX, ATX, E-ATX
Drive Bay	int. : 3x 2.5" & 1x 3.5" / 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	1x USB3.2 Gen2 Type C, 2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Modes Button
Cooling System	Front: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator / 420mm radiator Top: 3x 120mm / 2x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 1x 140mm PSU Cover : 2 x 120mm Side: 2 x 120mm
Pre-installed	3x140mm PWM Fans
Dimension	465mm x 230mm x 495mm
CPU Cooler Support	Max. 175mm
VGA Support	Max. 400mm





Night HUNTER GS-03B-BLK-OP

GS-

M/B Support	Mini ITX, M-ATX, ATX, E-ATX
Drive Bay	int. : 3x 2.5" & 1x 3.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	1x USB 3.2 Gen2 Type C, 2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 1x 140mm / 120mm radiator PSU Cover: 2 x 120mm
Pre-installed	4x 140mm PWM Fans
Dimension	445mm x 238mm x 450mm
CPU Cooler Support	Max. 178mm
VGA Support	Max. 425mm



HUNTER 3 GS-03B-OP

GS-

M/B Support	Mini ITX, M-ATX, ATX, E-ATX
Drive Bay	int. : 3x 2.5" & 1x 3.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	1x USB 3.2 Gen2 Type C, 2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 3x 120mm / 3x 140mm / 240mm radiator / 280mm radiator / 360mm radiator Rear: 1x 120mm / 1x 140mm / 120mm radiator PSU Cover: 2 x 120mm
Pre-installed	4x 120 ARGB Fans
Dimension	445mm x 238mm x 450mm
CPU Cooler Support	Max. 178mm
VGA Support	Max. 425mm





HUNTER 2 GS-02B-OP

GS-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int. : (2x 3.5 or 1x 2.5 , 1x 3.5) & 2x 2.5
Power Supply	ATX PSU (optional, ~180mm)
Front I/O	1x USB Type C, 1x USB3.0, Audio-out(AZALIA / HD-Audio), Mic-In, RGB Brightness Button, RGB Modes Button
Cooling System	Front: 2x 140mm / 3x 120mm / 360mm radiator PSU Cover: 2x 120mm
Pre-installed	4x 120 ARGB Fans
Dimension	408mm x 210mm x 464mm
CPU Cooler Support	Max. 170mm
VGA Support	Max. 320mm



HUNTER GS-01B-OP

GS-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int. : (2x 3.5 or 1x 2.5 , 1x 3.5) & 2x 2.5
Power Supply	ATX PSU (optional, ~180mm)
Front I/O	2x USB3.0, Audio-out(AZALIA / HD-Audio), Mic-In, RGB Brightness Button, RGB Modes Button
Cooling System	Front: 2x 140mm / 3x 120mm / 360mm radiator PSU Cover: 2x 120mm
Pre-installed	4x 120 ARGB Fans
Dimension	408mm x 210mm x 464mm
CPU Cooler Support	Max. 170mm
VGA Support	Max. 320mm



SCORPION 3 GL-03B-UC-OP

GL-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	1x USB3.2 Gen2 Type-C, 2x USB3.0, Audio-out(AZALIA / HD-Audio) , Mic-In
Cooling System	Front: 3x 120mm / 2x 140mm / 280mm radiator Rear: 1x 120mm Top: 2x 120mm / 240mm radiator
Pre-installed	4x 120 ARGB Fans
Dimension	436mm x 202.5mm x 490mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



SCORPION 4 GL-04B-UC-OP

GL-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	1x USB3.2 Gen2 Type-C, 2x USB3.0, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 280mm radiator Rear: 1x 120mm Top: 2x 120mm / 240mm radiator
Pre-installed	4x 120 ARGB Fans
Dimension	436mm x 202.5mm x 490mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm





STALLION 2 GP-02B-UC-OP

GP-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int. : 4x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional)
Front I/O	1x USB3.2 Gen2 Type-C, 2x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Brightness Button, Fan Speed Control Button
Cooling System	Front: 1x 180mm / 3x 120mm / 360mm radiator Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 240mm radiator
Pre-installed	4x 120 ARGB Fans
Dimension	572mm x 210mm x 520mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 430mm



AS-01B-OP

AS-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int. : 2 x 3.5" & 2x 2.5"
Power Supply	ATX PSU (optional, ~180mm)
Front I/O	2x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 3x 120mm / 2x 140mm / 280mm radiator Rear: 1x 120mm Top: 2x 120mm / 2x 140mm
Pre-installed	1x 120 PWM Fans
Dimension	405mm x 212mm x 462mm
CPU Cooler Support	Max. 170mm
VGA Support	Max. 320mm



HAWK AL-02B-OP

AL-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. :1x 5.25" int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 3x 120mm / 2x 140mm / 240mm radiator Rear: 1x 120mm / 120mm radiator
Dimension	435mm x 202mm x 450mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



HAWK AL-02B-TG-OP

AL-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. :1x 5.25" int. : 2x 2.5" & 2x 3.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 3x 120mm / 2x 140mm / 240mm radiator Rear: 1x 120mm / 120mm radiator
Dimension	435mm x 200mm x 450mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



CW-01B-OP

CW-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 3x 5.25" & 1x 3.5" int. : 7x 3.5" or 7x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 2x 120mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 280mm radiator (use of 280mm radiator blocks first ODD drive) Bottom: 1x 120mm / 1x 140mm (depending on PSU length)
Dimension	490mm x 210mm x 471mm (stand +21mm)
CPU Cooler Support	Max. 165mm
VGA Support	Max. 270mm(410mm if middle HDD cage removed)



CM-25B-OP

CM-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 4x 5.25" & 1x 3.5" int. : 3x 3.5" & 1x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	490mm x 198mm x 437mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 280mm (400mm when HDD cage removed)



BM-25B-OP

BM-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 3x 5.25" & 1x 3.5" int. : 3x 3.5" & 1x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	491mm x 198mm x 437mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 280mm (400mm when HDD cage removed)



LF-02B-OP

LF-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 4x 3.5" & 1x 2.5"
Power Supply	ATX (optional)
Front I/O	1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 120mm Rear: 1x 120mm Bottom: 1x 120mm Left: 2x 120mm In VGA card holder: 1x 120mm
Pre-installed	1x 120mm fan
Dimension	487mm x 200mm x 430mm (Stand +15mm)
CPU Cooler Support	Max. 165mm
VGA Support	Max. 320mm



CG-04B-OP

CG-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	ATX (optional)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	484mm x 180mm x 404mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 380mm



LG-01B-OP

LG-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	ATX (optional)
Front I/O	1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Bottom: 2x 80mm Left: 2x 120mm
Dimension	484mm x 180mm x 404mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 380mm



HC-10B-OP

HC-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 3x 5.25" & 1x 3.5" int. : 5x 3.5" oder 4x 3.5" & 1x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), 1x USB 2.0 Type C (480 Mbit/s), Mic-in
Cooling System	Front: 1x 120mm / 1x 90mm / 1x 80mm Rear: 1x 120mm / 1x 90mm / 1x 80mm
Dimension	450mm x 185mm x 412mm (Stand +8mm)
CPU Cooler Support	Max. 155mm
VGA Support	Max. 250mm (380mm when HDD cage removed)



CQ-01B-U3-OP

CQ-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 3x 3.5"
Power Supply	ATX (optional)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	428mm x 160mm x 410mm (Stand +15mm)
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



HQ-01B-OP

HQ-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 3x 3.5"
Power Supply	ATX (optional)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	428mm x 160mm x 410mm (Stand +15mm)
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



UK-02B-OP

UK-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 1x 5.25" int. : 1x 2.5" & 2x 3.5" or 2x 2.5" & 1x 3.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in, 1x USB Type C (480Mbit/s)
Cooling System	Front: 2x 120mm Rear: 1x 80mm
Dimension	380mm x 227mm x 342mm (Stand +17mm)
CPU Cooler Support	Max. 110mm
VGA Support	Max. 290mm(315mm when without fan)



UC-03B-OP

UC-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 1x 5.25" int. : 2 x 3.5" & 2x 2.5" or 1x 3.5" & 3x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, Reset, SD Card slot(Support SD / MMC / MS cards with data transfer rate up to 480Mbit/s)
Cooling System	Rear: 2x 60mm Top: 1x 120mm Bottom: 1x 120mm Side: 1x 120mm
Dimension	443mm x 166mm x 373mm
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



The Cube CI-03B-OP

CI-

M/B Support	Mini ITX, mATX
Drive Bay	2 x 3.5" and 2 x 2.5"
Power Supply	ATX PSU (optional, up to 160 mm length)
Front I/O	1x USB3.2 Gen2 Type C, 2 x USB3.0, Audio-out (AZALIA /HD-Audio), Mic-In
Cooling System	Front: 1x 200mm fan Rear: 1x 120mm fan Top: 2x 120mm or 1x 200mm fan / 240mm radiator
Pre-installed	1x 200mm PWM fan (featuring a HDB bearing)
Dimension	385 mm x 265 mm x 355 mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 335mm



PRO MINI AZ-01B-OP

AZ-

M/B Support	Mini ITX, mATX
Drive Bay	int. : 2x 2.5" & 1x 3.5"
Power Supply	ATX PSU (optional, ~180mm)
Front I/O	1x USB Type C, 1x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 3x 120mm / 240mm radiator / 280mm radiator / 360mm radiator Top: 2x 120mm / 2x 140mm / 240mm radiator / 280mm radiator Rear: 120mm PSU Cover: 2 x 120mm
Pre-installed	1x 120mm PWM fan
Dimension	360mm x 212mm x 420mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 330mm



BS-20B-OP

BS-

M/B Support	Mini ITX, mATX (max. 244mm x 244mm)
Drive Bay	ext. : 1 x 5.25" ultra slim 9.5mm ODD int. : 1 x 3.5" & 1 x 2.5" or 2 x 3.5" or 2 x 2.5"
Power Supply	ATX (optional)
Front I/O	1x USB Type C, 1x USB3.0, 2x USB2.0, Audio-Out/Mic-In
Cooling System	Rear: 1x 90mm
Pre-installed	1x 90mm fan
Dimension	408mm x 170mm x 303mm
CPU Cooler Support	Max. 143mm
VGA Support	Max. 270mm



BX-MESH BX-10B-M-OP

BX-

M/B Support	Mini ITX, mATX
Drive Bay	int. : 1 x 3.5" & 3 x 2.5" or 4 x 2.5"
Power Supply	ATX PSU (optional, ~180mm)
Front I/O	1x USB Type C, 1x USB3.0, Audio-Out/Mic-In
Cooling System	Bottom: 3x 120mm / 2x 140mm (140mm only with ITX board) Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 240mm radiator
Pre-installed	1 x 120mm PWM Fans
Dimension	415mm x 204mm x 325mm + (15mm feet)
CPU Cooler Support	Max. 165mm
VGA Support	Max. 380mm (300mm, if PSU longer than 180mm installed)



BX-10B-OP

BX-

M/B Support	Mini ITX, mATX
Drive Bay	int. : 1 x 3.5" & 3 x 2.5" or 4 x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	1x USB Type C, 1x USB3.0, Audio-Out/Mic-In
Cooling System	Bottom: 3x 120mm / 2x 140mm (140mm only with ITX board) Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 240mm radiator
Pre-installed	1 x 120mm PWM Fans
Dimension	415mm x 204mm x 325mm + (15mm feet)
CPU Cooler Support	Max. 165mm
VGA Support	Max. 380mm (300mm, if PSU longer than 180mm installed)



M2 GM-02B-OP

GM-

M/B Support	Mini ITX, mATX
Drive Bay	int. : 2x 3.5" & 2x 2.5" or 4x 2.5"
Power Supply	ATX PSU (optional, up to 160mm length recommended)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 2x 120mm / 2x 140mm / 280mm radiator Rear: 1x 120mm / 140mm Top: 2x 120mm / 240mm radiator
Pre-installed	3x 120mm ARGB Fans
Dimension	398mm x 273mm x 345mm (Stand +10mm)
CPU Cooler Support	Max. 200mm
VGA Support	Max. 340mm



UB-03B-350GPB

UB-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" & 1x 3.5" int. : 3x 3.5" & 1x 2.5" or 2x 3.5" & 2x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, Reset, 1x USB Type C (480Mbit/s), SD card (480Mbit/s)
Cooling System	Front: 1x 120mm Rear: 1x 80mm
Dimension	430mm x 207mm x 373mm
CPU Cooler Support	Max. 145mm
VGA Support	Max. 345mm



CI-01B-OP

CI-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" & 1x 3.5" int. : 2x 3.5" & 3x 2.5"
Power Supply	ATX (optional)
Front I/O	2x USB3.0, 1x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 120mm / 1x 140mm Rear: 1x 120mm Top: 1x 120mm
Dimension	390mm x 265mm x 325mm (Stand +22mm)
CPU Cooler Support	Max. 150mm
VGA Support	Max. 320mm



CI-02B-OP

CI-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" & 1x 3.5" int. : 2x 3.5" & 3x 2.5"
Power Supply	ATX PSU (optional, up to 160 mm length)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 120mm / 1x 140mm Rear: 1x 120mm Top: 1x 120mm / 1x 140mm
Dimension	390mm x 265mm x 295mm (Stand +22mm)
CPU Cooler Support	Max. 160mm
VGA Support	Max. 320mm



BD-25B-350GPB

BD-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	395mm x 198mm x 376mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 340mm



CT-01B-350GPB

CT-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



CT-04B-350GPB

CT-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



HT-01B-350GPB

HT-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



LT-01B-350GPB

LT-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



XT-01B-350GPB

XT-


M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	408mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



DT-10B-300

DT-


M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5,25" ultra slim 9,5mm ODD int. : 1x 2.5" and 1x 3.5"
Power Supply	GPF-300P (TFX 300W)
Front I/O	1x USB Type C, 1x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	-
Dimension	294mm x 92mm x 341mm
CPU Cooler Support	Max. 70mm
VGA Support	Max. 140mm



BE-10B-300

BE-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" ultra slim 9.5mm ODD int. : 1x 2.5" & 1x 3.5"
Power Supply	GPF-300P (TFX 300W)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 80mm
Pre-installed	1x 80mm
Dimension	283mm x 95mm x 327mm
CPU Cooler Support	Max. 50mm
VGA Support	Max. 220mm



BE-10W-300

BE-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" ultra slim 9.5mm ODD int. : 1x 2.5" & 1x 3.5"
Power Supply	GPF-300P (TFX 300W)
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 80mm
Pre-installed	1x 80mm
Dimension	283mm x 95mm x 327mm
CPU Cooler Support	Max. 50mm
VGA Support	Max. 220mm



CS-12B-300

CS-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" & 1x 3.5" int. : 1x 3.5" & 1x 2.5"
Power Supply	GPF-300P (TFX 300W) incl.
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm
Dimension	356mm x 102mm x 338mm
CPU Cooler Support	Max. 85mm
VGA Support	Max. 195mm



UE-02B

UE-


M/B Support	Mini ITX, mATX
Drive Bay	ext. : 1x 5.25" int. : 1x 3.5" & 2x 2.5"
Power Supply	250W (SFX-250VS) incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	2x 80mm
Dimension	410mm x 105mm x 300mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 200mm



BS-10B-300

BS-

M/B Support	Mini ITX, mATX (max. 244mm x 220mm)
Drive Bay	ext. : 1x 5.25" ultra slim ODD int. : 1x 3.5" & 1x 2.5"
Power Supply	GPF-300P (TFX 300W) incl.
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, USB Type C (480Mbit/s), SD Card slot (Support SD/MMC/MS cards with data transfer rate up to 480Mbit/s)
Cooling System	Rear: 1x 80mm
Dimension	290mm x 145mm x 343mm (stand+2mm)
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



IX-06B-OP

IX-

M/B Support	Mini ITX, mATX (max. 244mm x 220mm)
Drive Bay	int. : 2 x 2.5"
Power Supply	Optional AC-DC adapter with DC-DC transformer (CDP-120ITX or CDP-085ITX)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	-
Dimension	265mm x 66mm x 300mm (Stand+10mm)
CPU Cooler Support	Max. 35mm
VGA Support	-



HO-11B-350GPB

HO-

M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 2x 3.5" int. : 3x 3.5" & 2x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm
Dimension	368mm x 173mm x 365mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



HO-12B-350GPB

HO-


M/B Support	Mini ITX, mATX
Drive Bay	ext. : 2x 5.25" & 1x 3.5" int. : 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W) incl.
Front I/O	2x USB3.0, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm
Dimension	368mm x 173mm x 365mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



CN-01B-OP

CN-

M/B Support	Mini ITX
Drive Bay	ext. :1x 5.25" slim ODD int. : 3x 3.5" & 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-In, Reset
Cooling System	Rear: 1x 120mm
Dimension	356mm x 260mm x 195mm
CPU Cooler Support	Max. 145mm (depending on 3.5" HDD installation)
VGA Support	Max. 230mm - 320mm (depending on PSU length)



BT-02B-U3-250VS

BT-

M/B Support	Mini ITX
Drive Bay	ext. :1x 5.25" int. : 1x 3.5" & 1x 2.5"
Power Supply	SFX-250VS / 250Watt SFX 230V only incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Front: 1x 80mm Rear: 2x 60mm
Dimension	240mm x 135mm x 295mm
CPU Cooler Support	Max. 110mm
VGA Support	Max. 190mm



BU-12B-300

BU-

M/B Support	Mini ITX
Drive Bay	ext. : 1x 5.25" Ultra Slim Line int. : 1x 3.5" & 1x 2.5"
Power Supply	GPF-300P (300W) incl.
Front I/O	2x USB3.0, Audio-out (AZALIA / HD-Audio), Mic-in, SD card slot (supports SD/MMC/MS card with transfer speed 480Mbps (9 pin USB2.0 internal connector))
Cooling System	Front: 1x 80mm
Pre-installed	1x 80mm Fan
Dimension	290mm x 92.5mm x 280mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 150mm

**IX-01B-OP**

IX-

M/B Support	Mini ITX
Drive Bay	ext. : Optional (1x 5.25" Slim Line in MK-35DV included) int. : 2x 2.5" or (1x 3.5" and 1x 2.5") with optional HDD Kit MK-35DV
Power Supply	Optional AC-DC adapter with DC-DC transformer (CDP-085ITX)
Front I/O	-
Cooling System	2x 50mm
Dimension	220mm x 197mm x 63mm
CPU Cooler Support	Max. 30mm with 2.5" HDD/SSD
VGA Support	-

**IX-03B-OP**

IX-

M/B Support	Mini ITX
Drive Bay	ext. : Optional (1x 5.25" Slim Line in MK-35DV included) int. : 2x 2.5" or (1x 3.5" and 1x 2.5") with optional HDD Kit MK-35DV
Power Supply	Optional AC-DC adapter with DC-DC transformer (CDP-085ITX)
Front I/O	-
Cooling System	2x 50mm
Dimension	220mm x 197mm x 63mm
CPU Cooler Support	Max. 30mm with 2.5" HDD/SSD
VGA Support	-



UNC-209S-B

UNC-

M/B Support	mATX, ATX
Drive Bay	ext. : 1x 5.25" & 1x 3.5" int. : 2x 2.5" & 2x 3.5"
Power Supply	PSF-400B(400W)
Front I/O	2x USB3.0
Cooling System	Front: 1x 80mm Rear: 1x 80mm / 2x 40mm
Dimension	457mm x 430mm x 88mm
CPU Cooler Support	Max. 60mm
VGA Support	-



UNC-210T-B-U3

UNC-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext. : 1x 5.25" int. : 4x 3.5"
Power Supply	PSF-400B (400W)
Front I/O	2x USB3.0
Cooling System	3x 80mm
Dimension	557mm x 482.6mm x 89mm
CPU Cooler Support	Max. 65mm
VGA Support	-



UNC-409S-B

UNC-

M/B Support	mATX, ATX
Drive Bay	ext. : 3x 5.25" & 1x 3.5" int. : 2x 3.5" & 3x 2.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU with included mounting kit(not included)
Front I/O	2x USB3.0
Cooling System	Front: 2x 120mm Rear: 2x 80mm
Dimension	482mm x 480mm x 177.5mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 350mm





UNC-409S-AIO

M/B Support	Mini ITX, M-ATX, ATX, E-ATX, SSI-CEB, SSI-EEB
Drive Bay	int. : 2x 3.5" & 2x 2.5"
Power Supply	PSF-400B (ATX 400W) Pre-Installed or Optional 1+1 Redundant PSU (mounting kit not included)
Front I/O	2x USB 3.0
Cooling System	Front: 3 x 120mm fans / 240mm radiator / 360mm radiator Rear: 2x 80mm fans
Dimension	480mm x 427mm x 176.8mm
CPU Cooler Support	70mm with 3.5" cage installed/ 130mm without 3.5" cage
VGA Support	450mm (if a AIO radiator is not installed)

UNC-



UNC-410S-B-U3

M/B Support	mATX, ATX (CEB 1.01)
Drive Bay	ext. : 3x 5.25" & 1x 3.5" int. : 4x 3.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU (not included)
Front I/O	2x USB3.0
Cooling System	2x 60mm (optional)/ 1x 80mm / 2x 90mm (pre installed)
Dimension	505mm x 482.6mm x 177.8mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 330mm

UNC-



UNC-411E-B

M/B Support	mATX, ATX, E-ATX
Drive Bay	ext. : 6x 5.25" & 3x 3.5" & 1x 5.25" slim line ODD int. : 2x 3.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU with included mounting kit(not included)
Front I/O	2x USB3.0
Cooling System	Front: 1x 120mm Rear: 2x 80mm
Dimension	600mm x 485mm x 177.5mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 330mm

UNC-

Class

02


PSUs

ATX

SFX

TFX

External PSU

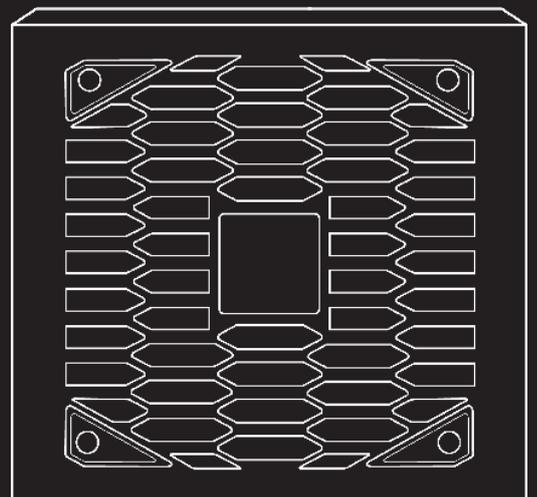



Stealth

SPX-1000-FC, SPX-1200-FC

SPX-

Power	1000W, 1200W
Efficiency	80Plus Platinum
AC Input	Full Range
PSU Length	140 mm
Fan	135mm FDB fan



VEGA M White

PPG-750-CW, PPG-850-CW, PPG-1000-CW

PPG-

Power	750W, 850W, 1000W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	150 mm
Fan	135mm FDB fan



VEGA M

PPG-750-C, PPG-850-C, PPG-1000-C

PPG-

Power	750W, 850W, 1000W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	150 mm
Fan	135mm FDB fan



VEGA

PPG-750-S, PPG-850-S

PPG-

Power	750W, 850W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	150 mm
Fan	135mm FDB fan



80 PLUS GOLD



ATMOS CPX-750FC, CPX-850FC

CPX-

Power	750W, 850W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	140 mm
Fan	120mm FDB fan



80 PLUS BRONZE



VITA SM3 BPX-650-C, BPX-750-C, BPX-850-C

BPX-

Power	650W, 750W, 850W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	140 mm
Fan	120mm sleeve fan



80 PLUS BRONZE



VITA BPX-650-S, BPX-750-S, BPX-850-S

BPX-

Power	650W, 750W, 850W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	140 mm
Fan	120mm sleeve fan



80 PLUS PLATINUM



POLARIS PRO PPX-1300FC-A3

PPX-

Power	1300W,
Efficiency	80Plus PLATINUM
AC Input	Full Range
PSU Length	160 mm
Fan	135mm FDB fan





POLARIS 3.0

PPS-850FC-A3, PPS-1050FC-A3,
PPS-1250FC-A3

PPS-

Power	850W, 1050W, 1250W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	160 mm
Fan	135mm FDB fan



POLARIS

PPS-850FC, PPS-1050FC, PPS-1250FC

Power	850W, 1050W, 1250W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	160 mm
Fan	135mm FDB fan



POLARIS

PPS-550FC, PPS-650FC, PPS-750FC

Power	550W, 650W, 750W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan



PowerUP

GPX-550FC, GPX-650FC, GPX-750FC,
GPX-850FC

GPX-

Power	550W, 650W, 750W, 850W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan





Core

BBS-500S, BBS-600S, BBS-700S

BBS-

Power	500W, 600W, 700W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan



SteelPower

BDK-550FC, BDK-650FC, BDK-750FC

BDK-

Power	550W, 650W, 750W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	140 mm
Fan	120mm FDB silent fan



Proton

BDF-400S, BDF-500S, BDF-600S

BDF-

Power	400W, 500W, 600W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan



Proton

BDF-650C, BDF-750C, BDF-850C, BDF-1000C

BDF-

Power	650W, 750W, 850W, 1000W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	160 mm
Fan	140mm silent fan




Task TPS-400S, TPS-500S, TPS-600S, TPS-700S

TPS-

Power	400W, 500W, 600W, 700W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan


Silicon SLC-650C, SLC-750C, SLC-850C, SLC-1000C

SLC-

Power	650W, 750W, 850W, 1000W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	160 mm
Fan	140mm silent fan


VALUE APB-400B8, APB-500B8, APB-600B8, APB-700B8

APB-

Power	400W, 500W, 600W, 700W
Efficiency	80PLUS White (230V Only)
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan


EON ZPU-400-S, ZPU-500-S, ZPU-600-S, ZPU-700-S

ZPU-

Power	400W, 500W, 600W, 700W
Efficiency	80Plus Standard 230V EU
AC Input	200-240V
PSU Length	140 mm
Fan	120mm silent fan





A-90 GDP-550C, GDP-650C, GDP-750C

GDP-

Power	550W, 650W, 750W
Efficiency	>90%
AC Input	230V Only
PSU Length	160 mm
Fan	140mm silent fan



A-80 CTG-550C, CTG-650C, CTG-750C

CTG-

Power	550W, 650W, 750W
Efficiency	>85%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan



ECO GPE-600S, GPE-700S

GPE-

Power	600W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan



Smart GPS-350A8, GPS-400A8, GPS-450A8, GPS-500A8, GPS-550A8, GPS-600A8, GPS-650A8, GPS-700A8

GPS-

Power	350W, 400W, 450W, 500W, 550W, 600W, 650W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan





ELEMENT

ELP-350S, ELP-400S, ELP-500S,
ELP-600S, ELP-700S

ELP-

Power	350W, 400W, 500W, 600W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan



Smart

PSF-400B

PSF-

Power	400W
Efficiency	>85%
AC Input	Full Range
PSU Length	140 mm
Fan	80mm silent fan



I-ARENA

GPA-350S8, GPA-400S8,
GPA-450S8, GPA-500S8

GPA-

Power	350W, 400W, 450W, 500W
Efficiency	>85%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan



GPA-550S, GPA-600S, GPA-650S, GPA-700S

Power	550W, 600W, 650W, 700W
Efficiency	<80%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan





GPB-350S, GPB-400S, GPB-450S, GPB-500S

GPB-

Power	350W, 400W, 450W, 500W
Efficiency	>85%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan



GPC-600S, GPC-700S

GPC-

Power	600W, 700W
Efficiency	80%
AC Input	230V Only
PSU Length	140 mm
Fan	120mm silent fan



SFX



COMPACT CSN-450C, CSN-550C, CSN-650C

CSN-

Power	450W, 550W, 650W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	100 mm
Fan	80mm silent fan



SMART BFX-350BS, BFX-450BS

BFX-

Power	350W, 450W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	100 mm
Fan	90mm silent fan



SMART SFX-250VS

SFX-

Power	250W
Efficiency	>85%
AC Input	230V Only
PSU Length	100 mm
Fan	80mm silent fan





SMART GPF-300P

GPF-

Power	300W
Efficiency	80Plus Bronze
AC Input	Full Range
PSU Length	175 mm
Fan	80mm silent fan

BULK

GPF-350P, GPF-400P

Power	350W, 400W
Efficiency	>85%
AC Input	Full Range
PSU Length	175 mm
Fan	80mm silent fan



BULK



GPF-500G

Power	500W
Efficiency	80Plus Gold
AC Input	Full Range
PSU Length	175 mm
Fan	80mm silent fan

BULK



External



External PSU CDP-085ITX, CDP-120ITX

CDP-

Power	85W, 120W
Efficiency	87%
AC Input	Full Range



Class


03

Cooling

Air cooling

Water cooling

Fan

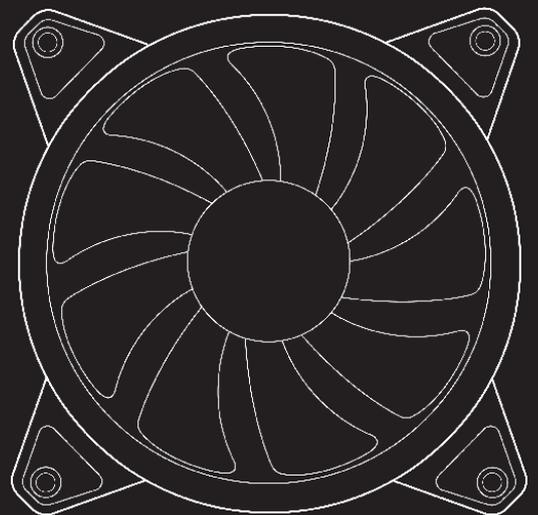

Air cooling



CAC-S92PWM-LP45

Dimension	110.8mm x 93mm x 45mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA115X AMD: AM5, AM4
Heat pipe	Ø6mm x 5 pcs
Fans	Dimension: 92mm x 92mm x 15mm Speed: 2300RPM ± 15% Air flow: 36CFM Noise: 38dBA Fan Connectors: 4-Pin PWM

Water cooling

ICEBERG White | CLC-360-RGB-W



Radiator	Dimensions: 392 x 120 x 27mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA1200, LGA1150, LGA1151, LGA1155, LGA1156 AMD: AM5, AM4, AM3+, AM3, AM2+, AM2, FM2+, FM2, FM1
Pump	Motor Speed : 1800 – 2700RPM Connector: 4-Pin PWM
Fans	Dimension: 120 x 120 x 25mm Speed: 500PRM – 2200RPM ± 10% Noise: 34.7dBA Fan Connectors: 4-Pin PWM & 3-Pin A-RGB



ICEBERG White | CLC-240-RGB-W

Radiator	Dimensions: 272 x 120 x 27mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA1200, LGA1150, LGA1151, LGA1155, LGA1156 AMD: AM5, AM4, AM3+, AM3, AM2+, AM2, FM2+, FM2, FM1
Pump	Motor Speed : 1800 – 2700RPM Connector: 4-Pin PWM
Fans	Dimension: 120 x 120 x 25mm Speed: 500PRM – 2200RPM ± 10% Noise: 34.7dBA Fan Connectors: 4-Pin PWM & 3-Pin A-RGB





Radiator	Dimensions: 392 x 120 x 27mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA1200, LGA1150, LGA1151, LGA1155, LGA1156 AMD: AM5, AM4, AM3+, AM3, AM2+, AM2, FM2+, FM2, FM1
Pump	Motor Speed : 1800 – 2700RPM Connector: 4-Pin PWM
Fans	Dimension: 120 x 120 x 25mm Speed: 500PRM – 2200RPM ± 10% Noise: 34.7dBA Fan Connectors: 4-Pin PWM & 3-Pin A-RGB



ICEBERG Dark | CLC-360-BLK



Radiator	Dimensions: 392 x 120 x 27mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA1200, LGA1150, LGA1151, LGA1155, LGA1156 AMD: AM5, AM4, AM3+, AM3, AM2+, AM2, FM2+, FM2, FM1
Pump	Motor Speed : 1800 – 2700RPM Connector: 4-Pin PWM
Fans	Dimension: 120 x 120 x 25mm Speed: 500PRM – 2200RPM ± 10% Noise: 34.7dBA Fan Connectors: 4-Pin PWM

ICEBERG | CLC-240-RGB



Radiator	Dimensions: 272 x 120 x 27mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA1200, LGA1150, LGA1151, LGA1155, LGA1156 AMD: AM5, AM4, AM3+, AM3, AM2+, AM2, FM2+, FM2, FM1
Pump	Motor Speed : 1800 – 2700RPM Connector: 4-Pin PWM
Fans	Dimension: 120 x 120 x 25mm Speed: 500PRM – 2200RPM ± 10% Noise: 34.7dBA Fan Connectors: 4-Pin PWM & 3-Pin A-RGB



ICEBERG Dark | CLC-240-BLK



Radiator	Dimensions: 272 x 120 x 27mm
Socket Compatibility	Intel: LGA1851, LGA1700, LGA1200, LGA1150, LGA1151, LGA1155, LGA1156 AMD: AM5, AM4, AM3+, AM3, AM2+, AM2, FM2+, FM2, FM1
Pump	Motor Speed : 1800 – 2700RPM Connector: 4-Pin PWM
Fans	Dimension: 120 x 120 x 25mm Speed: 500PRM – 2200RPM ± 10% Noise: 34.7dBA Fan Connectors: 4-Pin PWM



ZF-1225PWM

Connector	Fan: 4 pin PWM
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm
Air Flow	33.12 CFM



ZF-1225RGB

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm
Air Flow	42.5 CFM
LED Lamp	24 pcs (Inner Ring: 8 pcs ; Outer Ring: 16pcs)
LED Type	Addressable RGB



ZF-1425PWM

Connector	Fan: 4 pin PWM
Fan Speed	1200 RPM \pm 10%
Dimension	140 x 140 x 25mm
Air Flow	56.4 CFM



ZF-1425RGB

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	140 x 140 x 25mm
Air Flow	48.2 CFM
LED Lamp	26 pcs (Inner Ring: 8 pcs ; Outer Ring: 18pcs)
LED Type	Addressable RGB





ZF-1225RGB-R REVERSE

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm
Air Flow	42.5 CFM
LED Lamp	24 pcs (Inner Ring: 8 pcs ; Outer Ring: 16pcs)
LED Type	Addressable RGB



ZF-1225WRGB

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm
Air Flow	42.5 CFM
LED Lamp	24 pcs (Inner Ring: 8 pcs ; Outer Ring: 16pcs)
LED Type	Addressable RGB



ZF-1225WRGB-R REVERSE

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm
Air Flow	42.5 CFM
LED Lamp	24 pcs (Inner Ring: 8 pcs ; Outer Ring: 16pcs)
LED Type	Addressable RGB



Nova Set | NF-3012-RGB

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm (each)
Air Flow	68 CFM
LED Lamp	32 pcs (Inner Ring: 16 pcs ; Outer Ring: 16pcs) in combination with our DF-100 control box
LED Type	Addressable RGB (A-RGB)





Nova | NF-1225RGB

Connector	Fan: 4 pin PWM ; ARGB: 3 pin
Fan Speed	1600 RPM \pm 10%
Dimension	120 x 120 x 25mm
Air Flow	68 CFM
LED Lamp	32 pcs (Inner Ring: 16 pcs ; Outer Ring: 16pcs)
LED Type	Addressable RGB (A-RGB)



Tornado Set | CF-3012-RGB

Connector	6PIN
Fan Speed	1200 RPM (adjustable via remote control: 60% / 75% / 100%)
Dimension	120 x 120 x 25mm (each)
Air Flow	53 CFM
Noise Level	16 dBA
Lightning mode	20x dynamic modes / 9x static modes
LED Type	Addressable RGB (A-RGB)



CF-1225RGB

Connector	6PIN
Fan Speed	1200 RPM
Dimension	120 x 120 x 25mm
Air Flow	53 CFM
Noise Level	16 dBA
Lightning mode	20x dynamic modes / 9x static modes (in combination with our DF-908 control board)
LED Type	Addressable RGB (A-RGB)



AF-12RGB

Connector	6PIN
Fan Speed	1200 RPM
Dimension	120 x 120 x 25mm
Air Flow	53 CFM
Noise Level	16 dBA
Lightning mode	20x dynamic modes / 9x static modes (in combination with our DF-908 control board)
LED Type	Addressable RGB (A-RGB)



AF-0625S, AF-0825S, AF-0925S, AF-1225S



Connector	3 PIN Connector / Molex		
Dimension/Fan Speed	AF-0625S -	60mm x 60mm x 25mm	- 2200 rpm
	AF-0825S -	80mm x 80mm x 25mm	- 2000 rpm
	AF-0925S -	90mm x 90mm x 25mm	- 1800 rpm
	AF-1225S -	120mm x 120mm x 25mm	- 1350 rpm

AF-0825PWM, AF-0925PWM, AF-1225PWM



Connector	4 PIN PWM Connector / Molex		
Dimension/Fan Speed	AF-0825PWM -	80mm x 80mm x 25mm	- 3000 rpm
	AF-0925PWM -	90mm x 90mm x 25mm	- 2600 rpm
	AF-1225PWM -	120mm x 120mm x 25mm	- 1650 rpm



Class

04

Accessories


Backplanes

External box

Docking station

USB hubs

Card reader

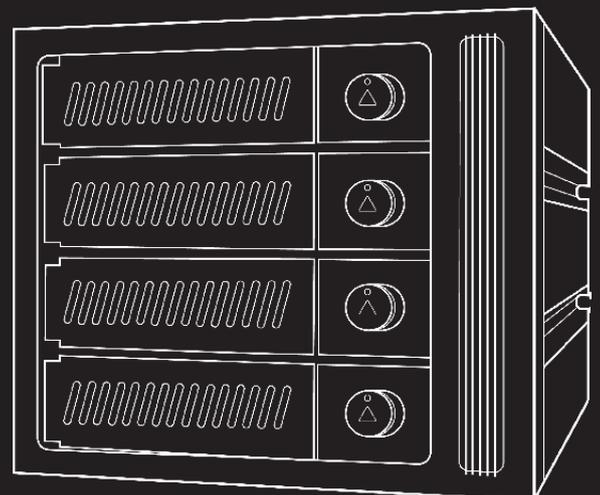

Backplanes

CBP-425



Interface	SATA I / II / III, SAS I / II / III
Dimension	159mm x 145.8mm x 41.6mm
Form Factor	1x 5.25" bay for 4x 2.5" HDDs/SSDs (max. HDD/SSD height up to 15mm)
Cooling	40mm fan
Power Connector	1x SATA
Data Interface (ext.)	4x SATA

CBP-625



Interface	SATA I / II / III, SAS I / II / III
Dimension	159mm x 145.8mm x 41.6mm
Form Factor	1x 5.25" bay for 6x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)
Cooling	40mm fan
Power Connector	1x SATA
Data Interface (ext.)	6x SATA

CMR-225



Interface	SATA I / II / III
Dimension	137mm x 102mm x 26mm
Form Factor	1x 3.5" bay for 2x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)
Cooling	--
Power Connector	1x SATA
Data Interface (ext.)	2x SATA

CMR-425



Interface	SATA I / II / III
Dimension	168mm x 146mm x 42mm
Form Factor	1x 5.25" bay for 4x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)
Cooling	1 x 40mm
Power Connector	1x Molex
Data Interface (ext.)	4x SATA

CMR-625



Interface	SATA I / II / III
Dimension	168mm x 146mm x 42mm
Form Factor	1x 5.25" bay for 6x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)
Cooling	1 x 40mm
Power Connector	2x Molex
Data Interface (ext.)	6x SATA

CMR-2131SAS



Interface	SATA, SAS I / II / III
Dimension	217mm x 146mm x 85mm
Form Factor	2x 5.25" bays for 3x SATA/SAS HDDs/SSDs (3.5"/2.5")
Cooling	80mm fan
Power Connector	2x Molex
Data Interface (ext.)	3x SATA
Data transfer rate	Speed up to 12Gbps

CMR-3141SAS



Interface	SATA, SAS I / II / III
Dimension	217mm x 146mm x 126mm
Form Factor	3x 5.25" bays for 4x SATA/SAS HDDs/SSDs (3.5"/2.5")
Cooling	80mm fan
Power Connector	2x Molex
Data Interface (ext.)	4x SATA
Data transfer rate	Speed up to 12Gbps

CBP-2131SAS



Interface	SATA I / II / III, SAS I / II
Dimension	207mm x 146mm x 86mm
Form Factor	2x 5.25" bays for 3 HDDs/SSDs (3.5" or 2.5")
Cooling	70mm fan
Power Connector	2x SATA
Data Interface (ext.)	3x SATA
Data transfer rate	Speed up to 6Gbps(SATA III / SAS)

CBP-3141SAS



Interface	SATA I / II / III, SAS I / II
Dimension	202mm x 146mm x 126mm
Form Factor	3x 5.25" bays for 4x SATA/SAS HDDs/SSDs (3.5" or 2.5")
Cooling	80mm fan
Power Connector	2x SATA
Data Interface (ext.)	4x SATA
Data transfer rate	Speed up to 6Gbps(SATA III / SAS)

External box

CEB-M2C-TL



Form Factor	M.2 PCI-E NVME SSD (M & B+M Key) 2230/2242/2260/2280
Dimension	104.3mm x 36.3mm x 13.4mm
Power	via Type-C Data Cable
Data transfer rate	Up to 10 GBit/s (USB 3.2 Gen2)
USB Interface(ext.)	USB 3.2 Gen2 Type-C

CEB-M2C-TLE



Form Factor	M.2 PCI-E NVME SSD (M & B+M Key) 2230/2242/2260/2280
Dimension	115.5mm x 32mm x 12.7mm
Power	via Type-C Data Cable
Data transfer rate	Up to 10 GBit/s (USB 3.2 Gen2)
USB Interface(ext.)	USB 3.2 Gen2 Type-C

Docking station

DSC-502



Dimension	103mm x 35mm x 13mm
Data transfer rate	Up to 5 GBit/s(USB 3.2 Gen 1)
Ports	2x USB 3.2 Gen1 Type-A (5 Gbps) 1x USB 3.2 Gen1 Type-C (5 Gbps) 1x HDMI (4K@30Hz) 1x USB Type-C for PD3.0 Charging (up to 80W)
Connector	USB 3.2 Gen1 Type-C (5 Gbps)

DSC-901



Dimension	134mm x 49mm x 15mm
Data transfer rate	Up to 5 GBit/s(USB 3.2 Gen 1)
Ports	2x USB 3.2 Gen1 Type-A (5 Gbps) 1x USB 3.2 Gen1 Type-C (5 Gbps) 1x HDMI (4K@30Hz) 1x Audio socket (need to connect HDMI output to support audio output) 1x USB Type-C for PD3.0 Charging (up to 80W) 1x SD card slot (480Mbit/s) 1x MicroSD card slot (480Mbit/s) 1x LAN Ethernet (up to 1 Gbps)
Connector	USB 3.2 Gen 2x2 Type C

USB HUBS

MUB-3002



Dimension	101mm x 25mm x 137mm
Form Factor	3.5" external drive bay
Internal Interface	1 x USB 3.1 Gen 1(5 Gbps)
External Interface	2 x Type-A Interface up to 5 GBit/s (USB 3.1 Gen 1)

MUB-3003C



Dimension	102mm x 25mm x 135mm
Form Factor	3.5" external drive bay
Internal Interface	1 x USB 3.1 Gen 1(5 Gbps) 1 x USB 3.1 Gen 2(10 Gbps)
External Interface	1x USB Type-C Interface up to 10 GBit/s (USB 3.1 Gen 2) 2x USB Type-A Interface up to 5 GBit/s (USB 3.1 Gen 1)

Card reader

CRD-908H



Dimension	135.2mm x 102.0mm x 25.3mm
Form Factor	3.5" external drive bay
Internal Interface	USB 3.2 Gen1 Socket (5 Gbps)
External Interface	2x USB 3.2 Gen1 Type-A (5 Gbps) 2x USB 3.2 Gen1 Type-C (5 Gbps) 1x USB Type-A for QC3.0 Charging 1x USB Type-C for PD3.0 & QC3.0 Charging 1x SD 3.0 card slot 1x MicroSD 3.0 card slot
Power	via Molex