


CATALOG | 2019/2020

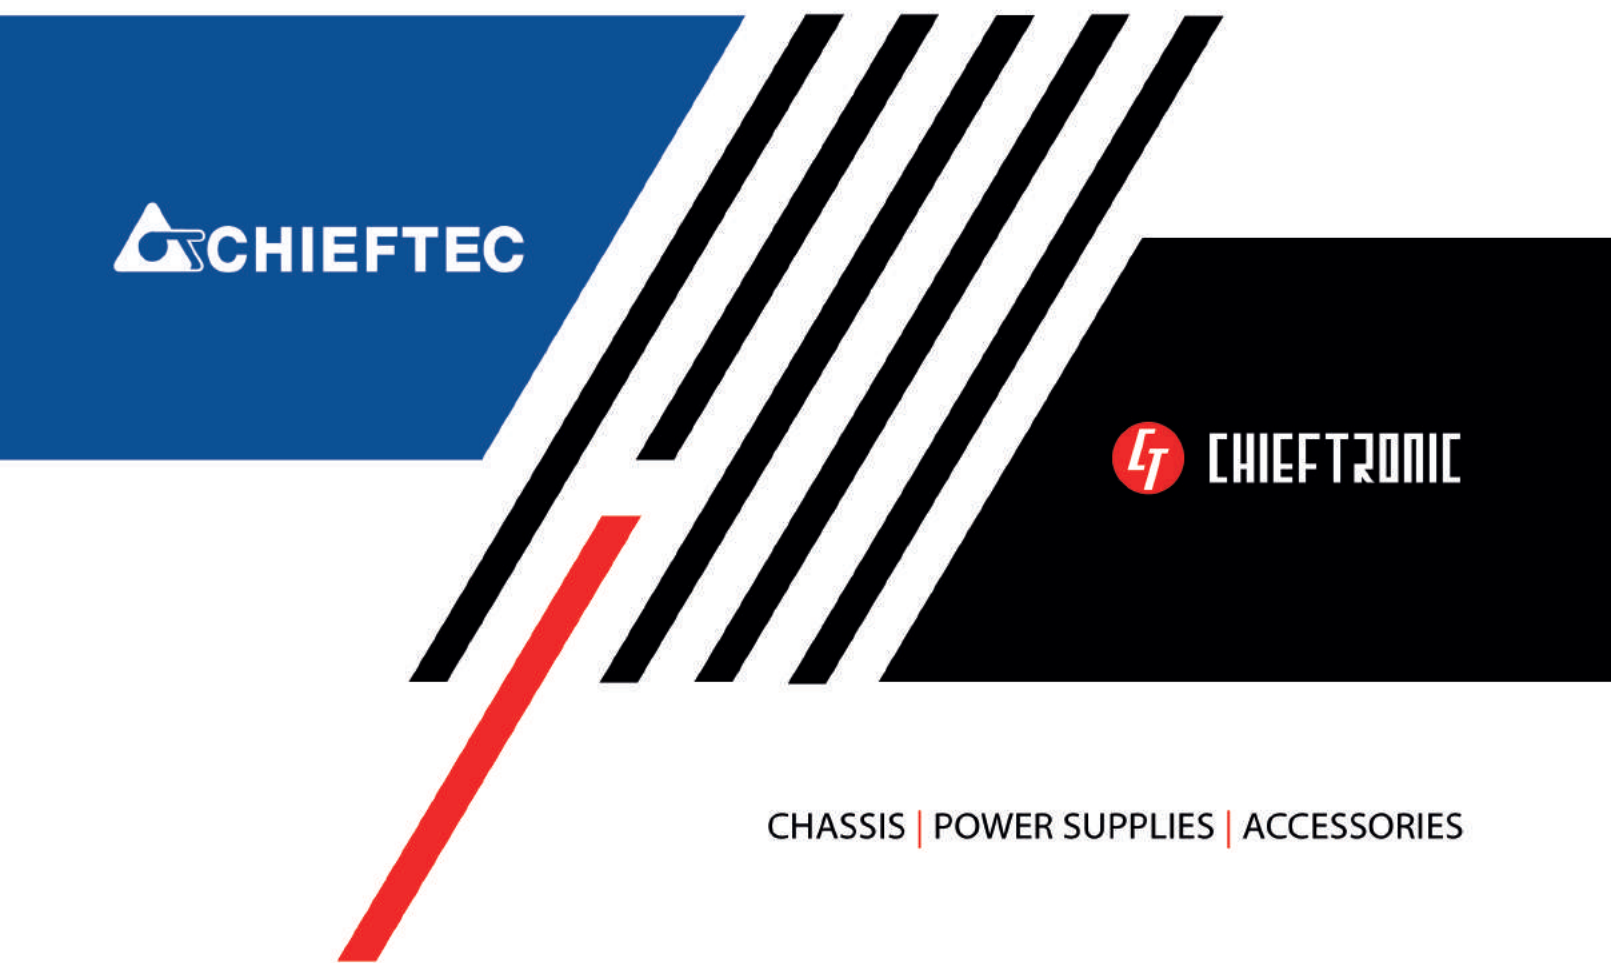

 **CHIEFTEC**

 **CHIEFTRONIC**

CHASSIS | POWER SUPPLIES | ACCESSORIES

IN THIS YOU CAN TRUST!

Since 1994, **Chieftec** has been a worldwide renowned brand, associated with high-quality PSU, PC cases, 19" IPC cases and accessories at good-value prices for the computer industry, servicing the global OEM, ODM and distributing (consumer) segments. **Arena Electronic GmbH** solely represents the **Chieftec** brand and services partner network of 100+ resellers across the entire Europe, Middle East, CIS and Africa regions, with the sole aim of continuously expanding its business in evolving markets.

A 3000 m² warehouse and a team of over 20 highly qualified professionals ensure a smooth and customer oriented technical, pre- and after-sales service as well as just-on-time deliveries, which is a minimum requirement in today's business environment.

× × ×

After over 25 years in the market representing the **Chieftec** brand, we have decided to introduce a new consumer-focused brand - **Chieftronic**, powered by **Chieftec**.

Chieftronic will build on the legacy of our **Chieftec** heritage of quality and experience in the PC chassis industry, while bringing in fresh and innovative design features, thus meeting the high demands of gamers and modern power-users. We are very excited to bring you the newest products and latest trends with tried and tested quality that you know you can trust.

INDEX

CHASSIS

ATX GAMING	3
M-ATX GAMING	3
ATX	4-6
M-ATX	6-9
ITX	9-10
19" IPC	11-12
CHIEFTRONIC	23

POWER SUPPLIES

ATX	13-17
SFX	18
TFX	18
EXTERNAL	19
REDUNDANT	19
CHIEFTRONIC	23

ACCESSORIES

COOLING	20
FRONT PANELS	20
BACKPLANES	21-22
EXTERNAL BOXES	22

SCORPION II | GL-02B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: -, int.: 2x 3.5" & 2x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 3x 120mm or 240mm radiator Top: 2x 120mm or 240mm radiator Rear: 1x 120mm
Pre-installed	3x 120mm at the front & 1x 120mm at the rear Rainbow RGB fans
Dimension	436mm x 203mm x 505mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



STALLION II | GP-02B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: -, int.: 2x 3.5" & 4x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 3x 120mm or 2x 140mm or 1x 180mm or 360mm radiator Top: 2x 120mm or 2x 140mm or 280mm radiator Rear: 1x 120mm
Pre-installed	3x 120mm at the front & 1x 120mm at the rear Rainbow RGB fans
Dimension	572mm x 210mm x 520mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 430mm



HAWK | AL-02B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 1x 5.25", int.: 2x 3.5" & 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 3x 120mm or up to 240mm radiator Rear: 1x 120mm or up to 120mm radiator
Dimension	435mm x 202mm x 453mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm

Gamer Series | CI-01B-OP

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 1x 5.25" & 1x 3.5", int.: 2x 3.5" & 3x 2.5"
Power Supply	ATX (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 120mm or 1x 140mm Rear: 1x 120mm Top: 1x 120mm
Dimension	390mm x 265mm x 325mm (stand +22mm)
CPU Cooler Support	Max. 150mm
VGA Support	Max. 320mm



Uni Series | UC-02B-350-GPB

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 1x 5.25", int.: (2x 3.5" & 2x 2.5") or (1x 3.5" & 3x 2.5")
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	2x 60mm & 2x 120mm
Dimension	445mm x 150mm x 380mm
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



Uni Series | UK-02B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 1x 5.25", int.: (2x 3.5" & 1x 2.5") or (1x 3.5" & 2x 2.5")
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB Type C (480 Mbit/s), Mic-in, Audio-out
Cooling System	Front: 2x 120mm Rear: 1x 80mm
Dimension	380mm x 227mm x 342mm (stand +17mm)
CPU Cooler Support	Max. 110mm
VGA Support	Max. with fan: 290mm, without fan: 315mm



Libra Series | LF-02B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 4x 3.5" & 1x 2.5"
Power Supply	ATX (optional)
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 120mm Bottom: 1x 120mm Left: 2x 120mm 1x 120mm fan in VGA card holder
Dimension	487mm x 200mm x 430mm (stand +15mm)
CPU Cooler Support	Max. 165mm
VGA Support	Max. 320mm



Libra Series | LG-01B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	ATX (optional)
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	484mm x 180mm x 404mm (stand +15mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 380mm

**Mesh Series | CQ-01B-U3-OP**

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 3x 3.5"
Power Supply	ATX (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	428mm x 160mm x 410mm (stand +15mm)
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm

**Mesh Series | CG-04B-OP**


M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	ATX (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	484mm x 180mm x 404mm (stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 380mm

**Elox Series | HC-10B-OP**

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 3x 5.25" & 1x 3.5", int.: 5x 3.5" or (4x 3.5" & 1x 2.5") w/o side-part of 3.5" HDD cage to support long VGA cards 3x 3.5" or (2x 3.5" & 1x 2.5") possible
Power Supply	ATX PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	450mm x 185mm x 412mm (stand +8mm)
CPU Cooler Support	Max. 155mm
VGA Support	Max. 250mm or 380mm w/o side-part of 3.5" HDD cage

**Elox Series | HQ-01B-OP**

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 3x 3.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 120mm Rear: 2x 80mm Left: 2x 120mm
Dimension	428mm x 160mm x 410mm (stand +15mm)
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



Classic Series | BM-25B-OP

M/B Support	Mini ITX, mATX, ATX
Drive Bays	ext.: 3x 5.25" & 1x 3.5", int.: 3x 3.5" & 1x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 90mm or 1x 120mm Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	465mm x 198mm x 425mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 380mm



Elox Series | HT-01B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	408mm x 180mm x 352mm (stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



Elox Series | HO-11B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 2x 3.5", int.: 3x 3.5" & 2x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm Rear: 1x 80mm or 1x 90mm
Dimension	368mm x 173mm x 365mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



Elox Series | HO-12B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm Rear: 1x 80mm or 1x 90mm
Dimension	368mm x 173mm x 365mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



Classic Series | BD-25B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	375mm x 198mm x 370mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm




Uni Series | BS-10G

M/B Support	Mini ITX, mATX (max. 244mm x 220mm)
Drive Bays	ext.: 1x 5.25" ultra slim ODD, int.: (1x 3.5" & 1x 2.5") or 2x 2.5"
Power Supply	GPF-250P (250W, TFX)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB Type C, 2x USB 2.0, Mic-in, Audio-out
Cooling System	Rear: 1x 80mm
Dimension	290mm x 145mm x 343mm (stand +2mm)
CPU Cooler Support	Max. 120mm
VGA Support	Max. 250mm



Uni Series | UE-02B

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 1x 5.25", int.: 1x 3.5" & (2x 2.5" or 2x 80mm)
Power Supply	SFX-250VS (250W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	2x 80mm
Dimension	410mm x 105mm x 300mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 200mm (half-height PCI-E)



Mesh Series | CS-12B

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 1x 5.25" & 1x 3.5", int.: 1x 3.5" & 1x 2.5"
Power Supply	GPF-250P (250W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm
Dimension	356mm x 102mm x 338mm
CPU Cooler Support	Max. 85mm
VGA Support	Half-height PCI-E



Mesh Series | CT-01B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm
	Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	425mm x 180mm x 352mm (stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



Mesh Series | CT-04B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm
	Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	425mm x 180mm x 352mm (stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm




Mesh Series | XT-01B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm
	Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	408mm x 180mm x 352mm (stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



Libra Series | LT-01B-350GPB

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 2x 5.25" & 1x 3.5", int.: 2x 3.5" & 1x 2.5"
Power Supply	GPB-350S (350W)
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 1x 80mm or 1x 90mm or 1x 120mm
	Rear: 1x 80mm or 1x 90mm or 1x 120mm
Dimension	425mm x 180mm x 352mm (stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm

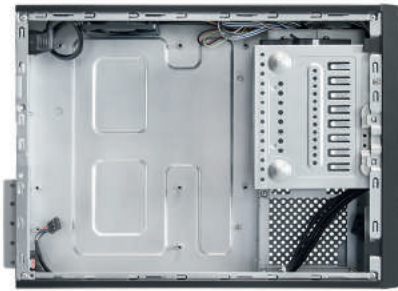

Flyer Series | FN-03B

M/B Support	Mini ITX, mATX
Drive Bays	ext.: 1x 5.25", int.: 1x 3.5" & 1x 2.5"
Power Supply	SFX-350BS-L (350W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System (opt.)	Left: 1x 80mm pre-installed (left side in desktop position)
Dimension	415mm x 95mm x 296mm (tower position)
CPU Cooler Support	Max. 70mm
VGA Support	Max. 230mm (half-height PCI-E)

Flyer Series | FI-01B-U3

M/B Support	Mini ITX
Drive Bays	ext.: 1x 5.25" Slim Line, int.: 1x 3.5" & 1x 2.5"
Power Supply	GPF-250P (250W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	-
Dimension	265mm x 90mm x 270mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 150mm



Flyer Series | FI-03B


M/B Support	Mini ITX
Drive Bays	ext.: 1x 5.25" Slim Line, int.: 1x 3.5" & 1x 2.5"
Power Supply	GPF-250P (250W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	-
Dimension	265mm x 90mm x 270mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 150mm



Uni Series | BU-12B

M/B Support	Mini ITX
Drive Bays	ext.: 1x 5.25" Ultra Slim Line, int.: 1x 3.5" & 1x 2.5"
Power Supply	GPF-250P (250W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 80mm (pre-installed)
Dimension	290mm x 93mm x 280mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 150mm





Compact Series | IX-01B-OP

M/B Support	Mini ITX
Drive Bays	ext.: optional (1x 5.25" Slim Line in MK-35DV included), int.: 2x 2.5" or (1x 3.5" & 1x 2.5") with optional HDD Kit MK-35DV
Power Supply	AC Power Adapter
Front I/O	-
Cooling System	2x 50mm
Dimension	220mm x 197mm x 63mm
CPU Cooler Support	Max. 30mm mit 2.5" HDD/SSD
VGA Support	-

Compact Series | IX-03B-OP

M/B Support	Mini ITX
Drive Bays	ext.: optional (1x 5.25" Slim Line in MK-35DV included), int.: 2x 2.5" or (1x 3.5" & 1x 2.5") with optional HDD Kit MK-35DV
Power Supply	AC Power Adapter
Front I/O	-
Cooling System	2x 50mm
Dimension	220mm x 197mm x 63mm
CPU Cooler Support	Max. 30mm mit 2.5" HDD/SSD
VGA Support	-

Uni Series | BT-02B-U3-250VS

M/B Support	Mini ITX
Drive Bays	ext.: 1x 5.25", int.: 1x 3.5" & 1x 2.5"
Power Supply	SFX-250VS (250W, 230V only)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 80mm Rear: 2x 60mm
Dimension	240mm x 135mm x 295mm
CPU Cooler Support	-
VGA Support	-

Elox Series | BT-04B-U3-250VS

M/B Support	Mini ITX
Drive Bays	ext.: 1x 5.25" Slim Line, int.: 2x 2.5" or (1x 3.5" & 1x 2.5")
Power Supply	SFX-250VS (250W, 230V only)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 80mm Rear: 2x 60mm
Dimension	240mm x 135mm x 323mm
CPU Cooler Support	Max. 60mm with 3.5" HDD/SSD / Max. 70mm with 2.5" HDD/SSD
VGA Support	Max. 190mm (e.g. GTX-750 / GTX-650)

Elox Series | BT-06B-250VS


M/B Support	Mini ITX
Drive Bays	ext.: -, int.: 1x 3.5" & 2x 2.5"
Power Supply	SFX-250VS (250W, 230V only)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out
Cooling System	Front: 1x 80mm Rear: 2x 60mm
Dimension	240mm x 135mm x 323mm
CPU Cooler Support	Max. 110mm
VGA Support	Max. 190mm

**UNC-210T-B-U3-OP**

M/B Support	mATX, ATX
Drive Bays	ext.: 1x 5.25", int.: 4x 3.5"
Power Supply	PSF-400B (400W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1)
Cooling System	3x 80mm
Dimension	557mm x 483mm x 89mm
CPU Cooler Support	Max. 65mm
VGA Support	Half-height PCI-E

**UNC-210TR-B-U3-OP**

M/B Support	mATX, ATX (riser card needed to install standard height add-on cards!)
Drive bays	ext.: 1x 5.25", int.: 4x 3.5"
Power supply	PSF-400B (400W)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1)
Cooling system	3x 80mm
Dimension	557mm x 483mm x 89mm
CPU Cooler Support	Max. 65mm
VGA Support	-

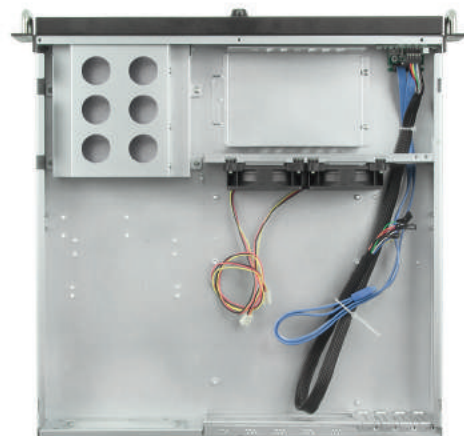
**UNC-210M-B**

M/B Support	mATX (low profile PCI cards)
Drive Bays	ext.: 1x 5.25" & 1x 3.5", int.: 3x 3.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU with included mounting kit
Front I/O	2x USB 3.0 (USB 3.1 Gen 1)
Cooling System	2x 80mm
Dimension	430mm x 480mm x 88mm
CPU Cooler Support	Max. 60mm
VGA Support	Half-height PCI-E



**UNC-310A-B-OP**

M/B Support	mATX, ATX
Drive Bays	ext.: 3x 5.25", int.: 4x 3.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU with included mounting kit
Front I/O	2x USB 3.0 (USB 3.1 Gen 1)
Cooling System	Rear: 2x 60mm & 1x 80mm
Dimension	530mm x 483mm x 133mm
CPU Cooler Support	110mm
VGA Support	-

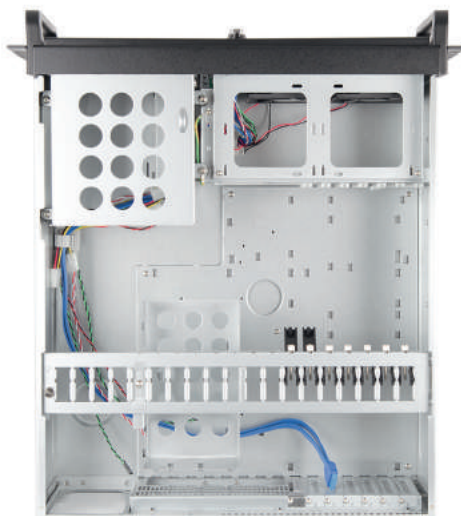**UNC-410S-B-U3-OP**

M/B Support	mATX, ATX (CEB 1.01)
Drive Bays	ext.: 3x 5.25" & 1x 3.5", int.: 4x 3.5"
Power Supply	Standard ATX PSU or installation of a 1+1 redundant PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1)
Cooling System	Rear: 1x 80mm
Dimension	505mm x 483mm x 178mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 330mm

**UNC-410F-B-OP**

M/B Support	mATX, ATX (CEB 1.01), E-ATX (SSI-EEB 3.x)
Drive Bays	ext.: 10x 5.25" or (9x 5.25" & 1x 3.5"), int.: 2x 3.5"
Power Supply	Standard ATX PSU or installation of a 1+1 redundant PSU (optional)
Front I/O	-
Cooling System	3x 90mm (pre-installed) & 2x 60mm (optional)
Dimension	667mm x 483mm x 178mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 330mm





Photon Gold Series | GDP-650C-RGB, GDP-750C-RGB

Power	650W, 750W
Fan	140mm silent Rainbow RGB fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>90%
PFC	Active PFC (0.9) (only 230V)
Dimension	160mm x 150mm x 87mm



A90 Series | GDP-550C, GDP-650C, GDP-750C

Power	550W, 650W, 750W
Fan	140mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>90%
PFC	Active PFC (0.9) (only 230V)
Dimension	160mm x 150mm x 87mm



Power Smart Series | GPS-450C, GPS-550C, GPS-650C, GPS-750C, GPS-1000C, GPS-1250C*, GPS-1350C*, GPS-1450C*

Power	450W, 550W, 650W, 750W, 1000W, 1250W, 1350W, 1450W
Fan	140mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80PLUS* Gold
PFC	Active PFC (0.9)
Dimension	160mm x 150mm x 87mm / 200mm x 150mm x 87mm*



Core Series | BBS-500S, BBS-600S, BBS-700S

Power	500W, 600W, 700W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form factor	PS II
Efficiency	80PLUS* Gold
PFC	Active PFC
Dimension	140mm x 150mm x 86mm

**Photon Series** | CTG-650C-RGB, CTG-750C-RGB

Power	650W, 750W
Fan	120mm silent Rainbow RGB fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm

**A-80 Series** | CTG-550C, CTG-650C, CTG-750C

Power	550W, 650W, 750W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9)
Dimension	140mm x 150mm x 87mm

**Eco Series** | GPE-400S, GPE-500S, GPE-600S, GPE-700S


Power	400W, 500W, 600W, 700W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm

**Smart Series** | GPS-400AB, GPS-500AB, GPS-550AB, GPS-600AB, GPS-650AB, GPS-700AB

Power	400W, 500W, 550W, 600W, 650W, 700W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC
Dimension	140mm x 150mm x 86mm


Proton Series | BDF-400S, BDF-500S, BDF-600S, BDF-650C*, BDF-750C*, BDF-850C*, BDF-1000C*

Power	400W, 500W, 600W, 650W, 750W, 850W, 1000W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80PLUS® Bronze
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm / 160mm x 150mm x 87mm*


NEW A-135 Series | APS-650CB **FOB**, APS-750CB **FOB**, APS-850-CB, APS-1000CB

Power	650W, 750W, 850W, 1000W
Fan	140mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80PLUS® Bronze
PFC	Active PFC (0.9)
Dimension	160mm x 150mm x 87mm


NEW A-135 Series | APS-400SB, APS-500SB, APS-550SB **FOB**, APS-600SB **FOB**, APS-650SB

Power	400W, 500W, 550W, 600W, 650W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80PLUS® Bronze
PFC	Active PFC (0.9)
Dimension	160mm x 150mm x 87mm


Value Series | APB-400B8, APB-500B8

Power	400W, 500W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form factor	PS II
Efficiency	<80%
PFC	Active PFC
Dimension	140mm x 150mm x 86mm


I-Arena Series | GPB-250S **FOB**, GPB-300S, GPB-350S, GPB-400S, GPB-450S, GPB-500S

Power	250W, 300W, 350W, 400W, 450W, 500W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm


I-Arena Series | GPC-350S, GPC-400S, GPC-450S **FOB**, GPC-500S, GPC-600S, GPC-700S

Power	350W, 400W, 450W, 500W, 600W, 700W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm


FOB
I-Arena Series | GPA-350S8, GPA-400S8, GPA-450S8, GPA-500S8

Power	350W, 400W, 450W, 500W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm


FOB
I-Arena Series | GPA-350S, GPA-400S, GPA-450S, GPA-500S, GPA-550S, GPA-600S, GPA-650S, GPA-700S

Power	350W, 400W, 450W, 500W, 550W, 600W, 650W, 700W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form factor	PS II
Efficiency	<80%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm



FOB

Silicon Series | SLC-650C, SLC-750C, SLC-850C, SLC-1000C

Power	650W, 750W, 850W, 1000W
Fan	140mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80PLUS® Bronze
PFC	Active PFC (0.9)
Dimension	160mm x 150mm x 87mm



FOB

Element Series | ELP-350S, ELP-400S, ELP-500S, ELP-600S, ELP-700S

Power	350W, 400W, 500W, 600W, 700W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm



FOB

Force Series | CPS-350S, CPS-400S, CPS-450S, CPS-500S, CPS-550S, CPS-650S, CPS-750S

Power	350W, 400W, 450W, 500W, 550W, 650W, 750W
Fan	120mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	140mm x 150mm x 87mm



FOB

Neutron Series | BLC-500S, BLC-600S, BLC-750C*, BLC-850C*, BLC-1000C*

Power	500W, 600W, 750W, 850W, 1000W
Fan	120mm / 140mm* silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	160mm x 150mm x 87mm / 160mm x 150mm x 87mm*





Smart Series | SFX-250V5, SFX-350B5, SFX-450B5

Power	250W, 350W, 450W
Fan	80mm silent fan
Specification	ATX 12V 2.3
Form Factor	SFX
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	100mm x 125mm x 64mm



Smart Series | SFX-350B5-L

Power	350W
Fan	80mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	>85%
PFC	Active PFC (0.9) (only 230V)
Dimension	125mm x 100mm x 64mm



Compact Series | CSN-450C, CSN-550C, CSN-650C

Power	450W, 550W, 650W
Fan	80mm silent fan
Specification	PS II
Form Factor	SFX
Efficiency	80PLUS® Gold
PFC	Active PFC (0.9)
Dimension	100mm x 125mm x 64mm



TFX | GPF-250P, GPF-300P, GPF-350P

Power	250W, 300W, 350W
Fan	80mm silent fan
Specification	ATX 12V 2.3
Form Factor	TFX
Efficiency	>85%
PFC	Active PFC (0.9)
Dimension	175mm x 86mm x 65mm

AC Power Adapter | CDP-085ITX, CDP-120ITX



Range	85W / 120W
Specification	100-240V ~ 1.5A / 50-60 Hz
DC Output	7.5A @ +12V / 10A @ +12V
Efficiency	87%
PFC	Active PFC
Dimension	133mm x 58mm x 30.3mm / 175mm x 75mm x 45mm

REDUNDANT



MRT-6320P

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	185mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 320W



MRW-6420P

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	194mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 420W



MRG-6500P

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	185mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 500W



MRW-5600V

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	210mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 600W



MRG-5700V

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	210mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 700W



MRG-5800V

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	210mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 800W



MRT-5320G

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	185mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 320W



MRT-5450G

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	185mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 450W



MRW-5600G

Specification	PS II ATX 12V 2.3 Active PFC (0.9)
Dimension	185mm x 150mm x 87mm
Fan	2x 40mm per each module
Range	2x 600W



Tornado| CF-1225RGB, CF-3012-RGB (3-RGB fan set)

Connector	6PIN
Fan Speed	1200 RPM
Dimension	120mm x 120mm x 25mm
Air Flow	53 CFM
Noise Level	16 dBA
LED Colors	16.8 Million colors
Lighting mode	20x dynamic / 9x static (in combination with our DF-906/908 control units)



AF-12RGB

Connector	6PIN
Fan Speed	1200 RPM
Dimension	120mm x 120mm x 25mm
Air Flow	53 CFM
Noise Level	16 dBA
LED Colors	16.8 Million colors
Lighting mode	20x dynamic / 9x static (in combination with our DF-906/908 control units)



AF-1238B, AF-1225PWM, AF-1225S, AF-0925PMW, AF-0925S, AF-0825PWM, AF-0825S, AF-0625S

Connector	4PIN PWM / Molex or 3PIN connector
Fan Speed	1350 RPM ~ 3000 RPM
Dimension	60mm, 80mm, 90mm and 120mm



CRD-901H

Interface	USB 3.0
Dimension	101mm x 25mm
Form Factor	3.5"
Data Transfer Rate	Up to 5 GBit/s (USB 3.0 Super-Speed)
Power Connector	Via Molex
Connector (int.)	USB 3.0 socket

MUB-3002

Interface	USB 3.0 onboard sockets
Dimension	101mm x 25mm x 137mm
Form Factor	3.5"
Data Transfer Rate	Up to 5 GBit/s (USB 3.0 Super-Speed)
Power Connector	Via USB 3.0
Connector (int.)	USB 3.0 socket



CRD-801H

Interface	USB 3.0
Dimension	101mm x 25mm
Form Factor	3.5"
Data Transfer Rate	Up to 5 GBit/s (USB 3.0 Super-Speed)
Power Connector	Via Molex
Connector (int.)	USB 3.0 socket



	CMR-125	CMR-225	CMR-425
Interface	SATA I/II/III	SATA I/II/III	SATA I/II/III
Dimension	138mm x 79mm x 11mm	137mm x 12mm x 26mm	168mm x 146mm x 42mm
Form Factor	1x PCI Slot bay for 1x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)	1x 3.5" bay for 2x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)	1x 5.25" bay for 4x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)
Cooling	-	-	1x 40mm
Power Connector	1x SATA	1x SATA	2x Molex
Data Interface (ext.)	1x SATA	2x SATA	6x SATA



	CMR-625	CMR-2131SAS	CMR-3141SAS
Interface	SATA I/II/III	SATA / SAS I/II/III	SATA / SAS I/II/III
Dimension	168mm x 146mm x 42mm	217mm x 126mm x 85mm	217mm x 146mm x 126mm
Form Factor	1x 5.25" bay for 6x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)	2x 5.25" bays for 3x SATA/SAS HDDs/SSDs (3.5"/2.5")	3x 5.25" bays for 4x SATA/SAS HDDs/SSDs (3.5"/2.5")
Cooling	1x 40mm	1x 80mm	1x 80mm
Power Connector	2x Molex	2x Molex	2x Molex
Data Interface (ext.)	6x SATA	3x SATA	4x SATA




	CBP-2131SAS	CBP-3141SAS	SST-3141SAS
Interface	SATA I/II/III, SAS I/II	SATA I/II/III, SAS I/II	SATA I/II/III, SAS I/II
Dimension	207mm x 146mm x 86mm	202mm x 146mm x 126mm	223.52mm x 147.32mm x 127mm
Form Factor	2x 5.25" bays for 3 HDDs/SSDs (3.5" or 2.5")	3x 5.25" bays for 4x SATA/SAS HDDs/SSDs (3.5" or 2.5")	3x 5.25" bays for 4x SATA/SAS HDDs/SSDs (3.5")
Cooling	1x 70mm	1x 80mm	1x 80mm
Power Connector	2x SATA	2x SATA	2x Molex
Data Interface (ext.)	3x SATA	4x SATA	4x SATA



ATM-1322S-RD

Interface	SATA I, SATA II, SATA III
Dimension	138mm x 79mm x 11mm
Form Factor	1x 3.5" bay for 2x 2.5" HDDs/SSDs (max. HDD/SSD height up to 9.5mm)
Cooling	-
Power Connector	1x SATA
Data Interface (ext.)	1x SATA
Supported Raid-Level	RAID 0 / RAID 1/ JBOD / DUAL (Needs port multiplier feature)

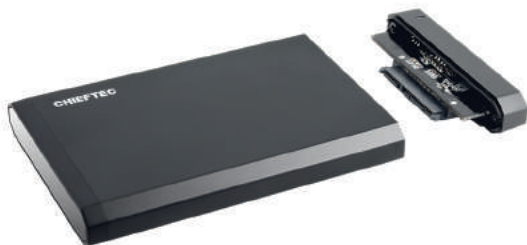

CEB-2511-U3

Form Factor	1x 2.5" (SATA-HDD/SSD, max. height 12.5mm)
Dimension	135mm x 85mm x 15mm
Power	Via USB 3.0 Data Cable
Data Transfer Rate	Up to 5 GBit/s (USB 3.0 Super-Speed)
Connector	USB 3.0 (mini USB 3.0 Host)
Special Features	Plug & Play
Scope of Delivery	1x CEB-2511-U3, USB 3.0 Data Cable



CEB-7025S

Form Factor	1x 2.5" (SATA-HDD/SSD, max. height 15mm)
Dimension	135mm x 86mm x 18mm
Power	Via USB 3.0 Data Cable
Data Transfer Rate	Up to 5 GBit/s (USB 3.0 Super-Speed)
Connector	USB 3.0 (mini USB 3.0 Host)
Special Features	Plug & Play
Scope of Delivery	1x CEB-7025S, USB3.0 Data Cable, stand, HDD Installation Guide



CEB-7035S

Form Factor	1x 3.5" (SATA-HDD/SSD)
Dimension	200mm x 128mm x 32mm
Power	AC Power Adapter
Data Transfer Rate	Up to 5 GBit/s (USB 3.0 Super-Speed)
Power Supply	AC adaptor 12V/2A 90V-250V (2.6A)
Connector	USB 3.0
Special Features	Plug & Play
Scope of Delivery	1x CEB-7035S, USB3.0 Data Cable, stand, HDD Installation Guide


G1 ATX GAMING TOWER | GR-01B-OP

M/B Support	Mini ITX, mATX, ATX (max. 305mm x 245mm)
Drive Bays	ext.: -, int.: (2x 3.5" & 4x 2.5") or (1x 3.5" & 5x 2.5")
Power Supply	ATX PSU (optional)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 2x 120mm or 2x 140mm or 280mm radiator Bottom: 3x 120mm or up to 360mm radiator (only in combination with mATX M/B) Rear: 1x 120mm fan pre-installed
Pre-installed	2x RGB LED strips pre-installed, 1x 120mm RGB fan pre-installed, 1x RGB control hub (remote control included)
Dimension	502mm x 210mm x 452mm (stand + 24mm)
CPU Cooler Support	Max. 160mm
VGA Support	Max. 400mm


M1 GAMING CUBE | GM-01B-OP

M/B Support	Mini ITX, mATX
Drive Bays	ext.: -, int.: (2x 3.5" & 2x 2.5") or 4x 2.5"
Power Supply	ATX PSU (optional, 140mm-180mm)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 1x USB 2.0, Mic-in, Audio-out
Cooling System	Front: 2x 120mm or 2x 140mm or 280mm radiator Rear: 1x 120mm or 1x 140mm (120mm fan pre-installed)
Pre-installed	2x RGB LED strips pre-installed, 1x 120mm RGB fan pre-installed, 1x RGB control hub (remote control included)
Dimension	400mm x 270mm x 345mm
CPU Cooler Support	Max. 180mm
VGA Support	Max. 320mm


PowerPlay Series | GPU-550FC, GPU-650FC, GPU-750FC, GPU-850FC, GPU-1050FC

Power	550W, 650W, 750W, 850W, 1050W
Fan	140mm silent fan
Specification	ATX 12V 2.3
Form Factor	PS II
Efficiency	80 PLUS® Gold (550W, 650W, 750W) / 80 PLUS® Platinum (850W, 1050W)
PFC	Active PFC
Dimension	160mm x 150mm x 86mm



chieftronic.com

chieftec.eu

Arena Electronic GmbH | Koppersstraße 18, 40549 Düsseldorf, Germany

Phone +49 (0) 211- 91 31 51 0 Fax +49 (0) 211- 91 31 51 99