

PRODUCT CATALOGUE

2023



X





CHIEFTEC - A successful story since 1994

For over 25+ years CHIEFTEC has been a world-wide renowned Brand, associated with high-quality PSU, PC cases, 19" IPC cases and Accessories manufacturing for the computer industry, servicing the global OEM, ODM and distributing (consumer) segments.

With our manufacturing plants located in Asia (China and Taiwan), we cover the entire production scope beginning with the in-house R&D, including the final assembling and ending with product distribution, marketing and positioning in the respective markets, segments and channels worldwide.

Since 1994, the ARENA ELECTRONIC GMBH solely represents the CHIEFTEC Brand and services the entire Europe, Middle East, CIS and Africa regions, with the sole aim of continuously expanding its business in evolving markets.

A 3000 square meter warehouse and a team of over 20 highly qualified professionals ensure a smooth and customer oriented technical, pre and after-sales service as well as just-on-time deliveries which is a minimum requirement in today's business environment.

In this you can trust !

C.E.O *Eddy Shih*

Class

01

The Cabinet
of computer


CASE

ATX

mATX

ITX

19"IPC

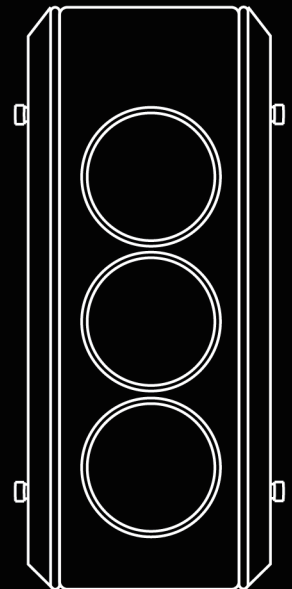

ATX



HUNTER GS-01B-OP

GS-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional, ~180mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio), RGB Brightness Button, RGB Modes Button |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1x 280mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 408mm x 210mm x 464mm |
| CPU Cooler Support | Max. 170mm |
| VGA Support | Max. 320mm |



SCORPION 2 GL-02B-OP

GL-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1x 280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 436mm x 202,5mm x 490mm |
| CPU Cooler Support | 166mm |
| VGA Support | 349mm |



SCORPION 3 GL-03B-OP

GL-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1x 280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 436mm x 202,5mm x 490mm |
| CPU Cooler Support | Max. 166mm |
| VGA Support | Max. 349mm |



SCORPION 3 White GL-03W-OP

GL-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1x 280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 436mm x 202,5mm x 490mm |
| CPU Cooler Support | Max. 166mm |
| VGA Support | Max. 349mm |





SCORPION 4 GL-04B-OP

GL-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.1 (USB3.2 Gen 1), 1x USB2.0, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 3x 120mm / 2x 140mm/ 1x280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 436mm x 202,5mm x 490mm |
| CPU Cooler Support | Max. 166mm |
| VGA Support | Max. 349mm |



STALLION 2 GP-02B-OP

GP-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5" , 4x 2.5" |
| Power Supply | ATX PSU (optional, ~220mm) |
| Front I/O | 2x USB3.2 Gen 1, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Brightness Button, Fan Speed Control Button |
| Cooling System | Front: 1x 180mm / 3x 120mm / 1 x 360mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 1 x 240mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 572mm x 210mm x 520mm |
| CPU Cooler Support | Max.160mm |
| VGA Support | Max.430mm |



STALLION 3 GP-03B-OP

GP-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5" , 4x 2.5" |
| Power Supply | ATX PSU (optional, ~200mm) |
| Front I/O | 2x USB3.2 Gen 1, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Brightness Button, Fan Speed Control Button |
| Cooling System | Front: 1x 180mm / 3x 120mm / 1 x 360mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 1 x 240mm |
| Pre-installed | 4x ARGB Fans |
| Dimension | 572mm x 210mm x 520mm |
| CPU Cooler Support | Max. 160mm |
| VGA Support | Max. 430mm |





Sound Insulated Side and Front Panels

**AS-01B-OP**

AS-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (Optional, ~ 180mm) |
| Front I/O | 2x USB3.2 Gen 1, 1x USB 2.0, Audio-out (AZALIA / HD-Audio, Mic-in) |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1x 280mm Rear: 1x 120mm Top: 2x 120mm / 2x140mm |
| Pre-installed | 1x 120 PWM Fans |
| Dimension | 405mm x 212mm x 462mm |
| CPU Cooler Support | Max. 170mm |
| VGA Support | Max. 320mm |

**HAWK AL-02B-OP**

AL-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:1x 5.25" / int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In , Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1 x 240mm Rear: 1x 120mm |
| Dimension | 435mm x 202mm x 450mm |
| CPU Cooler Support | Max. 166mm |
| VGA Support | Max. 349mm |

**HAWK AL-02B-TG-OP**

AL-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:1x 5.25" / int.:2x 3.5" , 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In , Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 3x 120mm / 2x 140mm / 1 x 240mm Rear: 1x 120mm |
| Dimension | 435mm x 200mm x 450mm |
| CPU Cooler Support | Max. 166mm |
| VGA Support | Max. 349mm |

**CW-01B-OP**

CW-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:3x 5.25", 1x 3.5" / int.:7x 3.5" or 7x 2.5" |
| Power Supply | ATX PSU (optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-In, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 2x 120mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 1x280mm Bottom: 1x 120mm or 140mm fan (depending on PSU length) |
| Dimension | 490mm x 210mm x 471mm (stand +21mm) |
| CPU Cooler Support | Max. 165mm |
| VGA Support | 270mm / 410mm (HDD cage removed) |



CM-25B-OP

CM-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:4x 5.25" ,1x 3.5" / int.:3x 3.5" , 1x 2.5" |
| Power Supply | ATX PSU (Optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In |
| Cooling System | Front: 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 490mm x 198mm x 437mm |
| CPU Cooler Support | Max. 165mm |
| VGA Support | 280mm / 400mm (HDD cage removed) |



BM-25B-OP

BM-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:3x 5.25" ,1x 3.5" / int.:3x 3.5" ,1x 2.5" |
| Power Supply | ATX PSU (Optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 90mm / 1x 120 mm Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 491mm x 198mm x 437mm |
| CPU Cooler Support | Max. 165mm |
| VGA Support | 280 / 400 mm (HDD cage removed) |



LF-02B-OP

LF-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.: 4x 3.5" ,1x 2.5" |
| Power Supply | ATX (optional) |
| Front I/O | 1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0 Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 120mm Bottom: 1x 120mm Side: 2x 120mm |
| Dimension | 487mm x 200mm x 430mm (Stand +15mm) |
| CPU Cooler Support | Max. 165mm |
| VGA Support | Max. 320mm |



CG-04B-OP

CG-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:2x 5,25" , 1x 3,5" / int.:2x 3,5" , 1x 2,5" |
| Power Supply | ATX (optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0 Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm / 1 x 90 mm / 1 x 120 mm Rear: 2x 80mm Side: 2x 120mm |
| Dimension | 484mm x 180mm x 404mm (Stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 380mm |

**LG-01B-OP****LG-**

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:2x 3.5" , 1x 2.5" |
| Power Supply | ATX (optional) |
| Front I/O | 2x USB 2.0, 1x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm / 1x 90mm / 1 x 120mm Bottom: 2x 80mm Side: 2x 120mm |
| Dimension | 484mm x 180mm x 404mm (stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 380mm |

**HC-10B-OP****HC-**

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.: 3x 5.25", 1x 3.5" / int.: 4x 3.5" , 1x 2.5" |
| Power Supply | ATX PSU (optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, 1x USB 2.0 Type C (480 Mbit/s) Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 120mm / 1x 90mm / 1x 80mm Rear: 1x 120mm / 1x 90mm / 1x 80mm |
| Dimension | 450mm x 185mm x 412mm (Stand+8mm) |
| CPU Cooler Support | Max. 155mm |
| VGA Support | 250mm / 380mm (HDD cage removed) |

**CQ-01B-U3-OP****CQ-**

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:3x 3.5" |
| Power Supply | ATX PSU (optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 120mm Rear: 2x 80mm Side: 2x 120mm |
| Dimension | 428mm x 160mm x 410mm (Stand +15mm) |
| CPU Cooler Support | Max. 120mm |
| VGA Support | Max. 250mm |


**HQ-01B-OP****HQ-**

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:3x 3.5" |
| Power Supply | ATX PSU (optional) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 120mm Rear: 2x 80mm Side: 2x 120mm |
| Dimension | 428mm x 160mm x 410mm (Stand +15mm) |
| CPU Cooler Support | Max. 120mm |
| VGA Support | Max. 250mm |

**UK-02B-OP**

UK-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:1x 5.25" / int.:2x 3.5", 1x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0(USB3.1 Gen 1), 1x USB Type C (480Mbit/s), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 2x 120mm Rear: 1x 80mm |
| Dimension | 380mm x 227mm x 342mm (Stand +17mm) |
| CPU Cooler Support | Max. 110mm |
| VGA Support | 290 mm / 315 mm (Without front fan) |

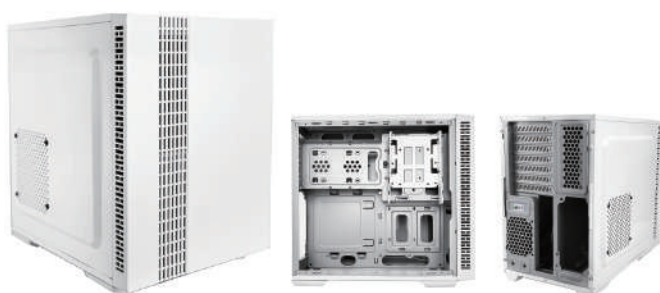**UK-02W-OP**

UK-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:1x 5.25" / int.:2x 3.5", 1x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0(USB3.1 Gen 1), 1x USB Type C (480Mbit/s), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 2x 120mm Rear: 1x 80mm |
| Dimension | 380mm x 227mm x 342mm (Stand +17mm) |
| CPU Cooler Support | Max. 110mm |
| VGA Support | 290 mm / 315 mm (Without front fan) |

UC-03B-OP

UC-



| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX, ATX |
| Drive Bay | ext.:1x 5.25" / int.:2x 3.5", 2x 2.5" |
| Power Supply | ATX PSU (optional) |
| Front I/O | 2x USB3.2 Gen 1 Audio-out (AZALIA / HD-Audio) Mic-in SD Card |
| Cooling System | Rear: 2x 60mm Top: 1x 120mm Bottom: 1x 120mm Side: 1x 120mm |
| Dimension | 443mm x 166mm x 373mm |
| CPU Cooler Support | Max. 120mm |
| VGA Support | Max. 250mm |





BD-25B-350GPB

BD-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:2x 3.5" , 1x 2.5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) Audio-out (AZALIA / HD-Audio), Mic-In |
| Cooling System | Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 395mm x 198mm x 376mm |
| CPU Cooler Support | Max. 165mm |
| VGA Support | Max. 340mm |



CT-01B-350GPB

CT-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:2x 3.5" , 1x 2.5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front : 1x 80mm / 1x 90mm / 1x 120mm Rear : 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 425mm x 180mm x 352mm (Stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |



CT-04B-350GPB

CT-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:2x 3.5" , 1x 2.5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Coolong System | Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 425mm x 180mm x 352mm (Stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |



HT-01B-350GPB

HT-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5.25" , 1x 3.5" / int.:2x 3.5" , 1x 2.5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 425mm x 180mm x 352mm (Stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |



LT-01B-350GPB

LT-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5,25" , 1x 3,5" / int.:2x 3,5" , 1x 2,5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 425mm x 180mm x 352mm (Stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |



XT-01B-350GPB

XT-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5,25" , 1x 3,5" / int.:2x 3,5" , 1x 2,5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm |
| Dimension | 408mm x 180mm x 352mm (Stand +3mm) |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |



HO-11B-350GPB

HO-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5,25" , 2x 3,5" / int.:3x 3,5" , 2x 2,5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0 Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm / 1x 90 mm Rear: 1x 80mm / 1x 90 mm |
| Dimension | 368mm x 173mm x 365mm |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |



HO-12B-350GPB

HO-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:2x 5,25" , 1x 3,5" / int.:2x 3,5" , 1x 2,5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0 Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm / 1x 90 mm Rear: 1x 80mm / 1x 90 mm |
| Dimension | 368mm x 173mm x 365mm |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 340mm |

**UB-03B-350GPB****UB-**

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext: 1x5.25" , 1x3.5" / int.:3x 3.5" , 1x 2.5" |
| Power Supply | GPB-350S / 350Watt ATX 230V Only |
| Front I/O | 2x USB3.2 Gen 1, Audio-out (AZALIA / HD-Audio),Mic-In, Reset, 1x USB Type C (480Mbit/s), SD card (480Mbit/s) |
| Cooling System | Front: 1x120mm Rear: 1x 80mm |
| Dimension | 430mm x 207mm x 373mm |
| CPU Cooler Support | Max. 145mm |
| VGA Support | Max. 345mm |

**CI-01B-OP****CI-**

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:1x 5.25" , 1x 3.5" / int.:2x 3.5" , 3x 2.5" |
| Power Supply | ATX PSU (Optional, ~ 160mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 120mm / 1x 140mm Rear: 1x 120mm Top: 1x 120mm |
| Dimension | 390mm x 265mm x 325mm (Stand +22mm) |
| CPU Cooler Support | Max. 150mm |
| VGA Support | Max. 320mm |

**CI-02B-OP****CI-**

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:1 x 5.25" , 1 x 3.5" / int.:2 x 3.5" ,3 x 2.5" |
| Power Supply | ATX PSU (Optional, ~ 160mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-In, Audio-out (AZALIA / HD-Audio), Reset |
| Cooling System | Front: 1x 120mm / 1x 140mm Rear: 1x 120mm Top: 1x 120mm / 1x 140mm |
| Dimension | 357mm x 321mm x 448mm (Stand +22mm) |
| CPU Cooler Support | Max. 160mm |
| VGA Support | Max. 320mm |



CS-12B-300

CS-

| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:1x 5.25" ,1x 3.5" / int.:1x 3.5" , 1x 2.5" |
| Power Supply | GPF-300P / 300Watt TFX 80+Bronze |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm |
| Dimension | 356mm x 102mm x 338mm |
| CPU Cooler Support | Max. 85mm |
| VGA Support | Max. 195mm |



UE-02B

UE-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.:1x 5.25" / int.:1x 3.5" , 2x 2.5" |
| Power Supply | SFX-250VS / 250Watt SFX 230V only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | 2x 80mm |
| Dimension | 410mm x 105mm x 300mm |
| CPU Cooler Support | Max. 65mm |
| VGA Support | Max. 200mm |



BS-10B-300

BS-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX (max. 244mm x 220mm) |
| Drive Bay | ext.:1x 5,25" Ultra Slim ODD Int.: 1x3.5" and 1x2.5" / 2x2.5" |
| Power Supply | GPF-300P / 300Watt TFX 80+Bronze |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-in, Audio-out (AZALIA / HD-Audio), 1xUSB Type C (480 Mbit/s), SD card slot |
| Cooling System | Rear: 1x 80mm |
| Dimension | 290mm x 145mm x 343mm (Stand +2mm) |
| CPU Cooler Support | 120mm |
| VGA Support | 250mm |



IX-06B-OP

IX-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX (max. 244mm x 220mm) |
| Drive Bay | int.:2x 2.5" |
| Power Supply | AC-Power adapter |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | - |
| Dimension | 265mm x 66mm x 300mm |
| CPU Cooler Support | 35mm |
| VGA Support | - |



BE-10B-300

BE-


| | |
|--------------------|--|
| M/B Support | Mini ITX, mATX |
| Drive Bay | ext.: 1x 5,25" Ultra Slim ODD Int.: 1x 3.5" and 1x 2.5" / 2x 2.5" |
| Power Supply | GPF-300P / 300Watt TFX 80+Bronze |
| Front I/O | 2x USB 3.2 Gen 1 2x USB 2.0 Audio-out (AZALIA / HD-Audio) Mic-in |
| Cooling System | Front: 1 x 80mm |
| Pre-installed | 1x 80mm |
| Dimension | 283mm x 95mm x 327mm |
| CPU Cooler Support | Max. 220mm |
| VGA Support | Max. 50mm |



BX-10B-OP

BX-

| | |
|--------------------|---|
| M/B Support | Mini ITX, mATX |
| Drive Bay | Int.: 1 x 3,5" & 3 x 2,5" or 4 x 2.5" |
| Power Supply | ATX PSU (optional, ~180mm recommended if GPU >300mm installed) |
| Front I/O | 1x USB 3.2 Gen1 Type-A, 1x USB 3.2 Gen1 Type-C, Audio-Out/Mic-In |
| Cooling System | Bottom: 3x 120mm or 2x 140mm (140mm only with ITX board) Rear: 1x 120mm Top: 2x 120mm or 2x 140mm fans or 240mm radiator |
| Pre-installed | 1x 120mm PWM Fan |
| Dimension | 415mm x 204mm x 325mm + (15mm feet) |
| CPU Cooler Support | Max. 165mm |
| VGA Support | 380mm (300mm, if PSU longer than 180mm installed) |

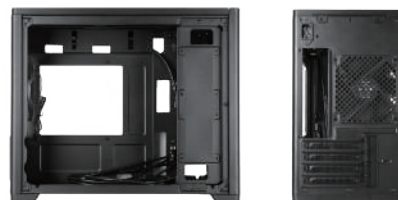

ITX



CN-01B-OP

CN-

| | |
|--------------------|---|
| M/B Support | Mini ITX |
| Drive Bay | ext.:1x 5.25" slim ODD int.:3x 3.5" , 2x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.2 Gen 1, Audio-out (AZALIA / HD-Audio), Mic-in , Reset |
| Cooling System | Rear: 1x 120mm |
| Dimension | 356mm x 260mm x 195mm |
| CPU Cooler Support | Up to 145mm (depending on 3.5" HDD installation) |
| VGA Support | 230mm - 320mm (depending on PSU length) |



BT-06B-250VS

BT-

| | |
|--------------------|--|
| M/B Support | Mini ITX |
| Drive Bay | int.:1x 3.5" , 2x 2.5" |
| Power Supply | SFX-250VS / 250Watt SFX 230V only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-In, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm Rear: 2x 60mm |
| Dimension | 240mm x 135mm x 323mm |
| CPU Cooler Support | Max. 110mm |
| VGA Support | Max. 190mm |



BT-02B-U3-250VS

BT-

| | |
|--------------------|--|
| M/B Support | mini ITX |
| Drive Bay | ext.:1x 5.25" / int.:1x 3.5" ,1x 2.5" |
| Power Supply | SFX-250VS / 250Watt SFX 230V only |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 1x 80mm Rear: 2x 60mm |
| Dimension | 240mm x 135mm x 295mm |
| CPU Cooler Support | - |
| VGA Support | - |

**BU-12B-300****BU-**

| | |
|--------------------|--|
| M/B Support | Mini ITX |
| Drive Bay | ext.:1x 5.25" Ultra Slim Line int.:1x 3.5" , 1x 2.5" |
| Power Supply | GPF-300P / 300Watt TFX 80+Bronze |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) SD card slot (Supports SD/MMC/MS card with transfer speed 480Mbps(9 pin USB2.0 internal connector)) |
| Cooling System | Front: 1x 80mm(1x 80mm fan is pre-installed) |
| Dimension | 290mm x 92,5mm x 280mm |
| CPU Cooler Support | Max. 65mm |
| VGA Support | Max. 150mm |

**IX-01B-OP****IX-**

| | |
|--------------------|--|
| M/B Support | Mini ITX |
| Drive Bay | ext.: Optional (1x 5.25" Slim Line in MK-35DV included) int.:2x 2.5" or (1x 3.5" and 1x 2.5" with optional HDD Kit MK-35DV) |
| Power Supply | AC-Power adapter |
| Front I/O | - |
| Cooling System | Front: 2x 50mm |
| Dimension | 220mm x 197mm x 63mm |
| CPU Cooler Support | 30mm |
| VGA Support | - |

**IX-03B-OP****IX-**


| | |
|--------------------|--|
| M/B Support | mini ITX |
| Drive Bay | ext.: Optional (1x 5.25" Slim Line in MK-35DV included) int.:2x 2.5" or (1x 3.5" and 1x 2.5" with optional HDD Kit MK-35DV) |
| Power Supply | AC-Power adapter |
| Front I/O | - |
| Cooling System | Front: 2x 50mm |
| Dimension | 220mm x 197mm x 63mm |
| CPU Cooler Support | 30mm |
| VGA Support | - |



UNC-209SR-B-OP

UNC-

| | |
|--------------------|--|
| M/B Support | mATX, ATX |
| Drive Bay | ext.:1x 5,25" / 1x3,5" / int.:2x 3,5" / 2x2,5" |
| Power Supply | PSF-400B / 400Watt ATX Full Range (not included) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Front: 1x80mm Rear: 3x 80mm / 2x40mm |
| Dimension | 457mm x 430mm x 88mm |
| CPU Cooler Support | Max. 60mm |
| VGA Support | Half Height |



UNC-210M-B

UNC-

| | |
|--------------------|--|
| M/B Support | mATX, (Low profile PCI cards) |
| Drive Bay | ext.:1x 5,25" / 1x 3,5" int.:3x 3,5" |
| Power Supply | PSF-400B / 400Watt tATX Full Range or installation of a mini redundant PSU with included mounting kit (not included) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Front: 2x 80mm (pre-installed) |
| Dimension | 430mm x 480mm x 88mm |
| CPU Cooler Support | Max. 60mm |
| VGA Support | Half Height |



UNC-210T-B-U3

UNC-

| | |
|--------------------|--|
| M/B Support | mATX, ATX |
| Drive Bay | ext.:1x 5,25" / int.:4x 3,5" |
| Power Supply | PSF-400B / 400Watt ATX Full Range (not included) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Rear: 3x 80mm (pre-installed) |
| Dimension | 557mm x 483mm x 89mm |
| CPU Cooler Support | Max. 65mm |
| VGA Support | Half Height |



UNC-210TR-B-U3

UNC-

| | |
|--------------------|---|
| M/B Support | mATX, ATX |
| Drive Bay | ext.:1x 5,25" int.:4x 3,5" |
| Power Supply | PSF-400B / 400Watt tATX Full Range (not included) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Rear: 3x 80mm (pre-installed) |
| Dimension | 557mm x 483mm x 89mm |
| CPU Cooler Support | Max. 65mm |
| VGA Support | Half Height |



UNC-310A-B

| | |
|--------------------|---|
| M/B Support | mATX, ATX |
| Drive Bay | ext.:3x 5,25" , 1x 3,5" int.:4x 3,5" |
| Power Supply | PSF-400B / 400Watt tATX Full Range or installation of a mini redundant PSU with included mounting kit |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Rear: 2x 60mm + 1x 80mm (pre-installed) |
| Dimension | 530mm x 483mm x 133mm |
| CPU Cooler Support | Max. 110mm |
| VGA Support | Max. 300mm |

UNC-



UNC-409S-B

| | |
|--------------------|--|
| M/B Support | mATX, ATX |
| Drive Bay | ext.:3x 5,25", 1x 3,5" int.:2x 3,5", 3x 2,5" |
| Power Supply | PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU with included mounting kit |
| Front I/O | 2x USB3.0 (USB3.2 Gen 1) |
| Cooling System | Front: 2x 120mm Rear: 2x 80mm |
| Dimension | 482mm x 480mm x 177.5mm |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 350mm |

UNC-



UNC-410S-B-U3

| | |
|--------------------|---|
| M/B Support | mATX, ATX (CEB 1.01) |
| Drive Bay | ext.:3x 5,25" / 1x 3,5" int.:4x 3,5" |
| Power Supply | Standard ATX PSU or installation of a mini redundant PSU (not included) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Front : 2x 90mm (pre installed) |
| Dimension | 505mm x 483mm x 178mm |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 330mm |

UNC-



UNC-411E-B

| | |
|--------------------|--|
| M/B Support | mATX, ATX, EATX |
| Drive Bay | ext.:6x 5,25", 3x 3,5" , 1x 5,25" slim line ODD int.:2x 3,5" |
| Power Supply | PSF-400B (400W) Standard ATX PSU or installation of a mini redundant PSU with included mounting kit (not included) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1) |
| Cooling System | Front: 1x 120mm Rear: 2x 80mm |
| Dimension | 600mm x 485mm x 177,5mm |
| CPU Cooler Support | Max. 140mm |
| VGA Support | Max. 330mm |

UNC-

Class

02

The heart
of computer

PSUs

ATX

SFX

TFX

External

Redundant



Polaris-Pro PPX-1300FC-A3

| | |
|------------|------------------|
| Power | 1300W |
| Efficiency | 80PLUS® Platinum |
| AC Input | Full Range |
| PSU Length | 160mm |
| Fan | 135mm FDB fan |



PPX-

Polaris-3.0 PPS-850FC-A3, PPS-1050FC-A3, PPS-1250FC-A3

| | |
|------------|-------------------|
| Power | 850W,1050W, 1250W |
| Efficiency | 80PLUS® GOLD |
| AC Input | Full Range |
| PSU Length | 160mm |
| Fan | 135mm FDB fan |



PPS-

Polaris PPS-850FC, PPS-1050FC, PPS-1250FC

| | |
|------------|-------------------|
| Power | 850W,1050W, 1250W |
| Efficiency | 80PLUS® GOLD |
| AC Input | Full Range |
| PSU Length | 160mm |
| Fan | 135mm FDB fan |



Polaris PPS-550FC, PPS-650FC, PPS-750FC

| | |
|------------|------------------|
| Power | 550W, 650W, 750W |
| Efficiency | 80PLUS® GOLD |
| AC Input | Full Range |
| PSU Length | 140mm |
| Fan | 120mm Silent fan |



Core BBS-500S, BBS-600S, BBS-700S

| | |
|------------|------------------|
| Power | 500W, 600W, 700W |
| Efficiency | 80PLUS® GOLD |
| AC Input | Full Range |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



BBS-



Volta VPS-600S, VPS-700S

| | |
|------------|------------------|
| Power | 600W, 700W |
| Efficiency | 80PLUS* BRONZE |
| AC Input | Full Range |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

VPS-

Proton BDF-400S, BDF-500S, BDF-600S

| | |
|------------|------------------|
| Power | 400W, 500W, 600W |
| Efficiency | 80PLUS* BRONZE |
| AC Input | Full Range |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

BDF-



BDF-650C, BDF-750C, BDF-850C, BDF-1000C

| | |
|------------|-------------------------|
| Power | 650W, 750W, 850W, 1000W |
| Efficiency | 80PLUS* BRONZE |
| AC Input | Full Range |
| PSU Length | 160mm |
| Fan | 140mm silent fan |



Task TPS-400S, TPS-500S, TPS-600S, TPS-700S

| | |
|------------|------------------------|
| Power | 400W, 500W, 600W, 700W |
| Efficiency | 80PLUS* BRONZE |
| AC Input | Full Range |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

TPS-

Silicon SLC-650C, SLC-750C, SLC-850C, SLC-1000C

| | |
|------------|-------------------------|
| Power | 650W, 750W, 850W, 1000W |
| Efficiency | 80PLUS* BRONZE |
| AC Input | Full Range |
| PSU Length | 160mm |
| Fan | 140mm silent fan |

SLC-





Photon Gold GDP-650C-RGB, GDP-750C-RGB **GDP-RGB**

| | |
|------------|-------------------------------|
| Power | 650W, 750W |
| Efficiency | >90% |
| AC Input | 230V Only |
| PSU Length | 160mm |
| Fan | 140mm silent ARGB Rainbow fan |



A90 GDP-550C, GDP-650C, GDP-750C **GDP-**

| | |
|------------|------------------|
| Power | 550W, 650W, 750W |
| Efficiency | >90% |
| AC Input | 230V Only |
| PSU Length | 160mm |
| Fan | 140mm silent fan |



Photon CTG-650C-RGB, CTG-750C-RGB **CTG-RGB**

| | |
|------------|-------------------------------|
| Power | 650W, 750W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent ARGB Rainbow fan |



A80 CTG-550C, CTG-650C, CTG-750C **CTG-**

| | |
|------------|------------------|
| Power | 550W, 650W, 750W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



ECO GPE-400S, GPE-500S, GPE-600S, GPE-700S **GPE-**

| | |
|------------|------------------------|
| Power | 400W, 500W, 600W, 700W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



**Smart**GPS-400A8, GPS-500A8, GPS-550A8,
GPS-600A8, GPS-650A8, GPS-700A8**GPS-**

| | |
|------------|------------------------------------|
| Power | 400W, 500W, 550W, 600W, 650W, 700W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

**Element**

ELP-350S, ELP-400S, ELP-500S, ELP-600S, ELP-700S

ELP-

| | |
|------------|------------------------------|
| Power | 350W, 400W, 500W, 600W, 700W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

**Force**CPS-350S, CPS-400S, CPS-450S, CPS-500S,
CPS-550S, CPS-650S, CPS-750S**CPS-**

| | |
|------------|--|
| Power | 350W, 400W, 450W, 500W, 550W, 650W, 750W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

**Value**

APB-400B8, APB-500B8, APB-600B8, APB-7 00B8

APB-

| | |
|------------|------------------------|
| Power | 400W, 500W, 600W, 700W |
| Efficiency | 80PLUS* WHITE |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |

**Solid**

GPP-400S, GPP-500S, GPP-600S, GPP-700S

GPP-

| | |
|------------|------------------------|
| Power | 400W, 500W, 600W, 700W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |





iArena GPA-350S8, GPA-400S8, GPA-450S8, GPA-500S8

GPA-

| | |
|------------|------------------------|
| Power | 350W, 400W, 450W, 500W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



GPA-550S, GPA-600S, GPA-650S, GPA-700S

| | |
|------------|------------------------|
| Power | 550W, 600W, 650W, 700W |
| Efficiency | <80% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



GPB-350S, GPB-400S, GPB-450S, GPB-500S

GPB-

| | |
|------------|------------------------|
| Power | 350W, 400W, 450W, 500W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



GPC-400S, GPC-500S, GPC-600S, GPC-700S

GPC-

| | |
|------------|------------------------|
| Power | 400W, 500W, 600W, 700W |
| Efficiency | 80% |
| AC Input | 230V Only |
| PSU Length | 140mm |
| Fan | 120mm silent fan |



Smart PSF-400B

PSF-

| | |
|------------|-----------------|
| Power | 400W |
| Efficiency | >85% |
| AC Input | Full Range |
| PSU Length | 140mm |
| Fan | 80mm silent fan |



SFX



Compact

CSN-450C, CSN-550C, CSN-650C

CSN-

| | |
|------------|------------------|
| Power | 450W, 550W, 650W |
| Efficiency | 80PLUS® GOLD |
| AC Input | Full Range |
| PSU Length | 100mm |
| Fan | 80mm silent fan |



Smart

BFX-350BS, BFX-450BS

BFX-

| | |
|------------|-----------------|
| Power | 350W, 450W |
| Efficiency | 80PLUS® Bronze |
| AC Input | 230V Only |
| PSU Length | 100mm |
| Fan | 90mm silent fan |



Smart

SFX-250VS

SFX-

| | |
|------------|-----------------|
| Power | 250W |
| Efficiency | >85% |
| AC Input | 230V Only |
| PSU Length | 100mm |
| Fan | 80mm silent fan |



TFX



TFX

GPF-300P

GPF-

| | |
|------------|-----------------|
| Power | 300W |
| Efficiency | 80PLUS® BRONZE |
| AC Input | Full Range |
| PSU Length | 175mm |
| Fan | 80mm silent fan |





GPF-350P, GPF-400P

| | |
|------------|-----------------|
| Power | 350W, 400W |
| Efficiency | >85% |
| AC Input | Full Range |
| PSU Length | 175mm |
| Fan | 80mm silent fan |



External



External PSU CDP-85ITX, CDP-120ITX

CDP-

| | |
|------------|------------|
| Power | 85W, 120W |
| Efficiency | 87% |
| AC Input | Full Range |



Class

03

Details make
computer Perfect

Accessories


Cooling

Backplanes

External box

Docking station

USB Hub

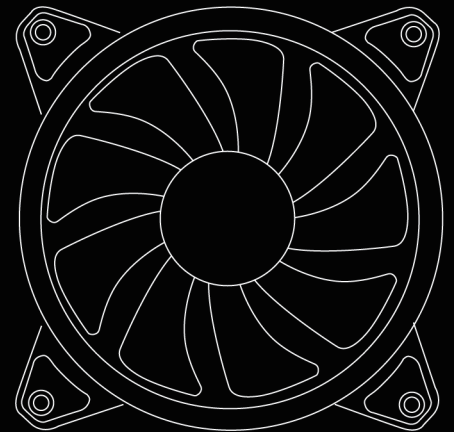

Cooling



TORNADO | CF-3012-RGB

CF-

| | |
|----------------|--|
| Connector | 6 pin |
| Fan speed | 1200 rpm |
| Dimension | 120mm x 120mm x 25mm |
| Air Flow | 53 CFM |
| Noise Level | 16 dBA |
| Lightning mode | 20x dynamic modes / 9x static modes(in combination with our DF-908 control board) |
| LED Type | Addressable RGB |



CF-1225RGB

CF-




| | |
|----------------|--|
| Connector | 6 pin |
| Fan speed | 1200 rpm |
| Dimension | 120mm x 120mm x 25mm |
| Air Flow | 53 CFM |
| Noise Level | 16 dBA |
| Lightning mode | 20x dynamic modes / 9x static modes(in combination with our DF-908 control board) |
| LED Type | Addressable RGB |



AF-12RGB

AF-



| | |
|----------------|--|
| Connector | 6 pin |
| Fan speed | 1200 rpm |
| Dimension | 120mm x 120mm x 25mm |
| Air Flow | 53 CFM |
| Noise Level | 16 dBA |
| Lightning mode | 20x dynamic modes / 9x static modes(in combination with our DF-908 control board) |
| LED Type | Addressable RGB |



AF-0625S, AF-0825S, AF-0925S, AF-1225S

AF-

| | |
|-----------------------|--|
| Connector | 3 PIN Connector / Molex |
| Dimension / Fan speed | AF-0625S - 60mm x 60mm x 25mm - 2200 rpm AF-0825S - 80mm x 80mm x 25mm - 2000 rpm AF-0925S - 90mm x 90mm x 25mm - 1800 rpm AF-1225S - 120mm x 120mm x 25mm - 1350 rpm |



AF-0825PWM, AF-0925PWM, AF-1225PWM

AF-PWM

| | |
|-----------------------|--|
| Connector | 4 PIN PWM Connector / Molex |
| Dimension / Fan speed | AF-0825PWM - 80mm x 80mm x 25mm - 3000 rpm AF-0925PWM - 90mm x 90mm x 25mm - 2600 rpm AF-1225PWM - 120mm x 120mm x 25mm - 1650 rpm |



Backplanes

CMR-125



| | | |
|----------------------|---|-------------|
| Interface | SATA I/II/III | CMR- |
| Dimension | 138mm x 79mm x 11mm | |
| Form factor | 1x PCI Slot bay for 1x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm) | |
| Cooling | -- | |
| Power Connector | 1 x SATA | |
| Data Interface(ext.) | 1 x SATA | |

CMR-225



| | | |
|----------------------|---|-------------|
| Interface | SATA I/II/III | CMR- |
| Dimension | 1137mm x 102mm x 26mm | |
| Form factor | 1x 3,5" bay for 2x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm) | |
| Cooling | -- | |
| Power Connector | 1 x SATA | |
| Data Interface(ext.) | 2 x SATA | |

CMR-425



| | | |
|----------------------|--|-------------|
| Interface | SATA I/II/III | CMR- |
| Dimension | 1168mm x 146mm x 42mm | |
| Form factor | 1x 5,25" bay for 4x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm) | |
| Cooling | -- | |
| Power Connector | 1 x Molex | |
| Data Interface(ext.) | 4 x SATA | |

CMR-625



| | | |
|----------------------|--|-------------|
| Interface | SATA I/II/III | CMR- |
| Dimension | 1168mm x 146mm x 42mm | |
| Form factor | 1x 5,25" bay for 6x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm) | |
| Cooling | 40mm fan | |
| Power Connector | 1 x Molex | |
| Data Interface(ext.) | 6 x SATA | |

CMR-2131SAS



| | | |
|----------------------|---|-------------|
| Interface | SATA, SAS I/II/III | CMR- |
| Dimension | 217mm x 146mm x 85mm | |
| Form factor | 2x 5,25" bays for 3x SATA/SAS HDDs/SSDs (3,5"/2,5") | |
| Cooling | 80mm fan | |
| Power Connector | 2 x Molex | |
| Data Interface(ext.) | 3 x SATA | |
| Data transfer rate | Speed up to 12Gbps | |

CMR-3141SAS



| | | |
|----------------------|---|-------------|
| Interface | SATA, SAS I/II/III | CMR- |
| Dimension | 217mm x 146mm x 126mm | |
| Form factor | 3x 5,25" bays for 4x SATA/SAS HDDs/SSDs (3,5"/2,5") | |
| Cooling | 80mm fan | |
| Power Connector | 2 x Molex | |
| Data Interface(ext.) | 4 x SATA | |
| Data transfer rate | Speed up to 12Gbps | |

CBP-2131SAS



| | | |
|----------------------|--|-------------|
| Interface | SATA I/II/III, SAS I/II | CBP- |
| Dimension | 207mm x 146mm x 86mm | |
| Form factor | 2x 5,25" bays for 3 HDDs/SSDs (3,5" or 2,5") | |
| Cooling | 70mm fan | |
| Power Connector | 2 x SATA | |
| Data Interface(ext.) | 3 x SATA | |
| Data transfer rate | Up to 6Gbps (SATA III / SAS) | |

CBP-3141SAS



| | | |
|----------------------|--|-------------|
| Interface | SATA I/II/III, SAS I/II | CBP- |
| Dimension | 202mm x 146mm x 126mm | |
| Form factor | 3x 5,25" bays for 4x SATA/SAS HDDs/SSDs (3,5" or 2,5") | |
| Cooling | 80mm fan | |
| Power Connector | 2 x SATA | |
| Data Interface(ext.) | 4 x SATA | |
| Data transfer rate | Up to 6Gbps (SATA III / SAS) | |

External Box

CEB-2511-U3



| | |
|----------------------------|--|
| Form factor | 1x 2.5" (SATA-HDD/SSD, max. Height 12,5mm) |
| Dimension | 135mm x 85mm x 15m |
| Power | via USB 3.0 Data Cable |
| Data transfer rate | Up to 5 GBit/s (USB 3.2 Gen1) |
| USB Interface(ext.) | USB 3.2 Gen1 Type-A |

CEB-M2C-TL



| | |
|----------------------------|---|
| Form factor | M.2 PCI-E NVME SSD (M & B+M Key) 2230/2242/2260/2280 |
| Dimension | 104.3mm x 36.3mm x 13.4mm |
| Power | via Type-C Data Cable |
| Data transfer rate | Up to 10 GBit/s (USB 3.2 Gen2) |
| USB Interface(ext.) | USB 3.2 Gen2 Type-C |

CEB-M2C-TLE



| | |
|----------------------------|---|
| Form factor | M.2 PCI-E NVME SSD (M & B+M Key) 2230/2242/2260/2280 |
| Dimension | 115.5mm x 32mm x 12.7mm |
| Power | via Type-C Data Cable |
| Data transfer rate | Up to 10 GBit/s (USB 3.2 Gen2) |
| USB Interface(ext.) | USB 3.2 Gen2 Type-C |

Docking station

DSC-502



| | |
|---------------------------|---|
| Dimension | 103mm x 35mm x 13mm |
| Data Transfer rate | Up to 5 GBit/s (USB 3.2 Gen1) |
| Ports | 2x USB 3.2 Gen1 Type-A (5 Gbps) 1x USB 3.2 Gen1 Type-C (5 Gbps) 1x HDMI (4K@30Hz) 1x USB Type-C for PD3.0 Charging (up to 80W) |
| Connector | USB 3.2 Gen1 Type-C |

DSC-901



| | |
|---------------------------|--|
| Dimension | 134mm x 49mm x 15mm |
| Data transfer rate | Up to 5 GBit/s (USB 3.2 Gen1) |
| Ports | 2x USB 3.2 Gen1 Type-A (5 Gbps) 1x USB 3.2 Gen1 Type-C (5 Gbps) 1x HDMI (4K@30Hz) 1x Audio socket (need to connect HDMI output to support audio output) 1x USB Type-C for PD3.0 Charging (up to 80W) 1x SD card slot (480Mbit/s) 1x TF card slot (480Mbit/s) 1x LAN Ethernet (up to 1 Gbps) |
| Connector | USB 3.2 Gen1 Type-C |

USB HUBS

MUB-3002

MUB-



| | |
|---------------------------|---|
| Dimension | 101mm x 25mm x 137mm |
| Form Factor | 3.5" external drive bay |
| Internal Interface | 1x USB 3.1 Gen1 (5 Gbps) |
| External Interface | 2x Type-A Interface up to 5 GBit/s (USB 3.1 Gen1) |

MUB-3003C

MUB-



| | |
|---------------------------|--|
| Dimension | 102.0mm x 25.3mm x 135.2mm |
| Form Factor | 3.5" external drive bay |
| Internal Interface | 1x USB 3.1 Gen1 (5 Gbps) 1x USB 3.1 Gen2 (10 Gbps) |
| External Interface | 1x USB Type-C Interface up to 10 GBit/s (USB 3.1 Gen 2) 2x Type-A Interface up to 5 GBit/s (USB 3.1 Gen1) |

Card Reader

CRD-908H

CRD-



| | |
|---------------------------|---|
| Dimension | 135.2mm x 102 mm x 25.3mm |
| Form Factor | 3.5" external drive bay |
| Internal Interface | USB 3.2 Gen1 Socket (5 Gbps) |
| External Interface | 2x USB 3.2 Gen1 Type-A (5 Gbps) 2x USB 3.2 Gen1 Type-C (5 Gbps) 1x USB Type-A for QC3.0 Charging 1x USB Type-C for PD3.0 & QC3.0 Charging 1x SD 3.0 card slot 1x MicroSD 3.0 card slot |
| Power | via Molex |



Chieftronic will build on the legacy of our Chieftec heritage of quality and experience in the PC chassis industry, while bringing in fresh and innovative design features, thus meeting the high demands of gamers and modern power-users.

CASE

PSU

ACCESSORIES



G1 GR-01B-OP

| | |
|--------------------|---|
| M/B Support | mITX, mATX, ATX |
| Drive Bay | int.:2x 3.5" , 4x 2.5" |
| Power Supply | ATX PSU (optional, 140mm - 200mm) |
| Front I/O | 2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front: 2x120mm / 2x140mm / 1x280mm Rear: 1x 120mm Bottom: 3x 120mm / 1x 360mm |
| Pre-installed | 1x 120mm RGB Fan |
| Dimension | 502mm x 210mm x 476mm |
| CPU Cooler Support | Max. 160mm |
| VGA Support | Max. 400mm |



M1 GM-01B-OP

| | |
|--------------------|--|
| M/B Support | mITX, mATX |
| Drive Bay | int.:2x 2.5" , 2x 3.5" |
| Power Supply | ATX PSU (optional, 140mm - 160mm) |
| Front I/O | 2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front:2x120mm / 2x140mm / 1x280mm Rear: 1x 120mm / 1x 140mm |
| Pre-installed | 1x 120mm ARGB Fan |
| Dimension | 400mm x 270mm x 345mm |
| CPU Cooler Support | Max. 180mm |
| VGA Support | Max. 320mm |



M2 GM-02B-OP

| | |
|--------------------|---|
| M/B Support | mITX, mATX |
| Drive Bay | int.:2x 2.5" , 2x 3.5" |
| Power Supply | ATX PSU (optional, 140mm - 160mm) |
| Front I/O | 2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio) |
| Cooling System | Front:2x120mm / 2x140mm / 1x280mm Rear: 1x 120mm / 1x 140mm Top: 2x 120mm / 240mm |
| Pre-installed | Front: 2x 120mm ARGB Fan Rear: 1x 120mm ARGB Fan |
| Dimension | 398mm x 273mm x 345mm (Stand :10mm) |
| CPU Cooler Support | Max. 200mm |
| VGA Support | Max. 340mm |



PowerPlay Gold GPU-550FC, GPU-650FC, GPU-750FC

| | |
|------------|------------------|
| Power | 550W, 650W, 750W |
| Efficiency | 80PLUS® GOLD |
| AC-Input | Full Range |
| PSU Length | 160 mm |
| Fan | 140mm silent fan |



PowerPlay Platinum GPU-850FC, GPU-1050FC, GPU-1200FC

| | |
|------------|--------------------|
| Power | 850W, 1050W, 1200W |
| Efficiency | 80PLUS® Platinum |
| AC-Input | Full Range |
| PSU Length | 160 mm |
| Fan | 140mm silent fan |



PowerUP GPX-550FC, GPX-650FC, GPX-750FC, GPX-850FC

| | |
|------------|------------------------|
| Power | 550W, 650W, 750W, 850W |
| Efficiency | 80PLUS® GOLD |
| AC-Input | Full Range |
| PSU Length | 140 mm |
| Fan | 120mm silent fan |



SteelPower BDK-550FC, BDK-650FC, BDK-750FC

| | |
|------------|------------------|
| Power | 550W, 650W, 750W |
| Efficiency | 80PLUS® Bronze |
| AC-Input | Full Range |
| PSU Length | 140 mm |
| Fan | 120mm silent fan |



HALO MP-800-ARGB

| | |
|----------------|--------------------------------|
| Connector | A-RGB 3-PIN (+5V) |
| Dimension (mm) | 800mm x 300mm x 4mm |
| Material | Plastic, Cloth, Natural Rubber |
| Cable Length | 2.7 m |
| LED Type | Addressable RGB |



NOVA NF-1225RGB

| | |
|-------------|--|
| Connector | Fan: 4 pin PWM / ARGB: 3 pin |
| Fan speed | 1600 RPM \pm 10% |
| Dimension | 120mm x 120mm x 25mm |
| Air Flow | 68 CFM |
| Noise Level | 24 dBA (Max: 28) |
| LED Lamp | 32 pcs (Inner Ring: 16 pcs ; Outer Ring: 32pcs) |
| LED Type | Addressable RGB |



NOVA Set NF-3012-RGB

| | |
|-------------|--|
| Connector | Fan: 4 pin PWM / ARGB: 3 pin |
| Fan speed | 1600 RPM \pm 10% |
| Dimension | 120mm x 120mm x 25mm |
| Air Flow | 68 CFM |
| Noise Level | 24 dBA (Max: 28) |
| LED Lamp | 32 pcs (Inner Ring: 16 pcs ; Outer Ring: 32pcs) |
| LED Type | Addressable RGB |

